




# TEMP-GARD HAND/WALL SHOWER W/ SUPPLY ELBOW & FLANGE

## Z7000-HW

### TAG \_\_\_\_\_



**ENGINEERING SPECIFICATIONS:** ZURN Z7000-HW Hand/wall shower unit consisting of plastic chrome plated hand-held shower head with 2.5 GPM pressure compensating flowrate and adjustable spray pattern. Also includes swivel connection, 60" flexible metal hose, 24" mounting bar wall connection, and supply elbow with flange.

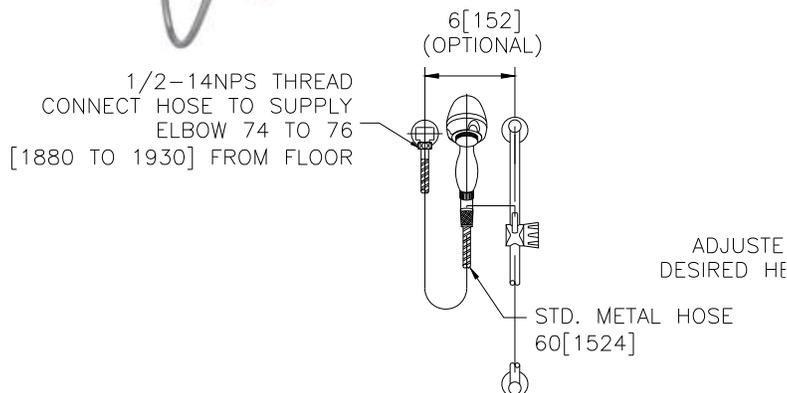

Note: All dimensions are for reference only. Do not use for pre-plumbing

### CONFIGURATIONS

- Z7000-HW2 HW with 69" metal hose
- Z7000-HW3 HW with 69" metal hose, 48" slide bar
- Z7000-HW4 HW with 69" vinyl hose
- Z7000-HW5 HW with 69" vinyl hose, 48" slide bar
- Z7000-HW6 HW with in-line vacuum breaker
- Z7000-HW7 HW with 60" vinyl hose
- Z7000-HW8 HW with 2 wall hooks
- Z7000-HW9 HW with 2 wall hooks, in-line vacuum breaker
- Z7000-HW10 HW with 2 wall hooks, 60" stainless steel hose, and in-line vacuum breaker
- Z7000-HW11 HW with 30" slide bar
- Z7000-HW12 HW with 30" slide bar and 69" vinyl hose
- Z7000-HW13 HW with 30" slide bar and 69" metal hose
- Z7000-HW14 HW with 36" grab gar and 60" metal hose
- Z7000-HW15 HW with 24" grab gar and 60" metal hose
- Z7000-HW16 HW with lever adjustment



### OPTIONAL ACCESSORIES

Suffix	Description
— H2	Hand Shower Head with Shut Off
— H4	Deluxe Plastic Hand Shower Head with pulse spray and shut-off lever
— H7	Plastic Chrome Plated Hand-Held Shower Head with 2.0 GPM Flowrate and Adjustable Spray
— H9	Plastic Chrome Plated Hand-Held Shower Head with 1.6 GPM Flowrate and Adjustable Spray

### STANDARDS

Tested to the following standards:  
Meets or exceeds ASME A112.18.1/ CSA B125.1

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330

Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905-405-8272 Fax: 905-405-1292