



TEMP-GARD SHOWER VALVE


Z7100-SS-LH

TAG _____



ENGINEERING SPECIFICATIONS: ZURN Z7100-SS-LH

Single handle pressure balancing mixing shower valve, with single bronze stem, stainless steel balancing piston integral with stem assembly, integral service stops, chrome plated metal lever handle and brass adjustment limit stop screw in cap. Complete with double seal packing, adjustable brass packing nut, and removable brass seats; all exposed trim with polished nickel chrome plated surface. The inlets, hot and cold shower outlet ports are standard with 1/2" female copper sweat connections.

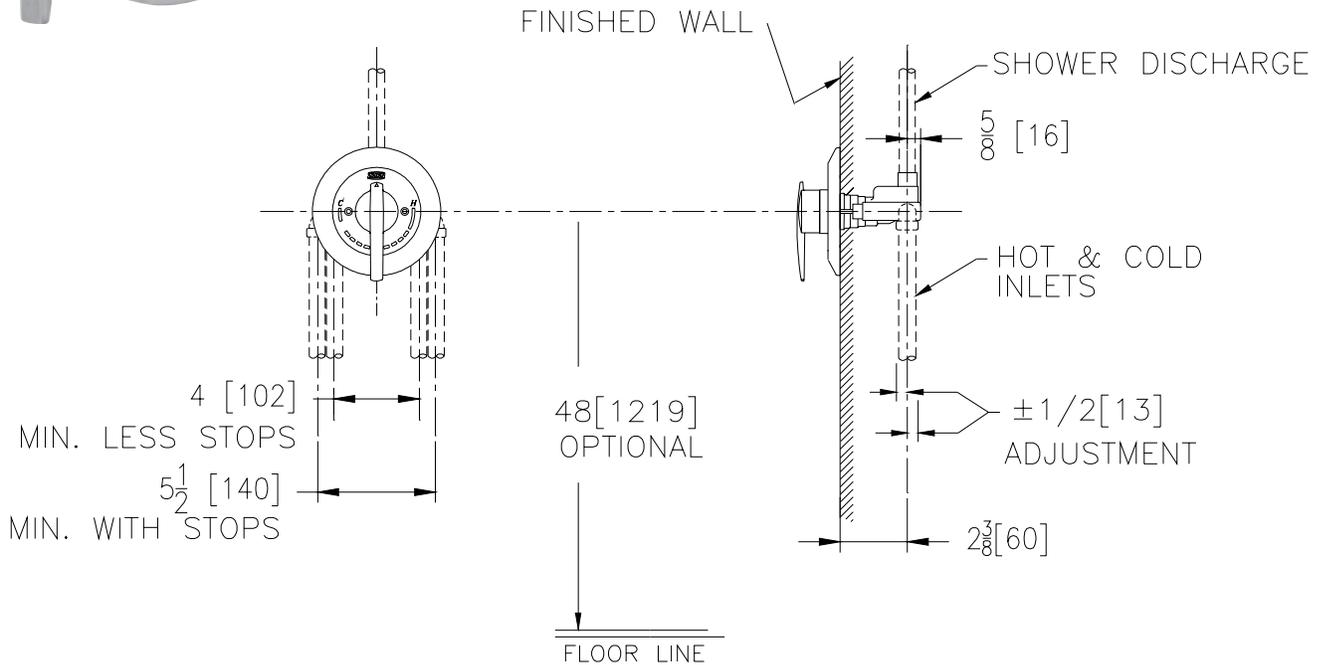

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONS (Check/specify appropriate options) Use with Z7000 Prefix

Suffix Description

Use with Z7000 prefix

- ___ -BC Back Connections (1/2") (For 90° Installations), Shipped as Loose Adaptors, to be Installed in the Field
- ___ -CC Conversion Cover Plate
- ___ -IP 1/2" Female Threaded Connections, Shipped as Loose Adaptors, to be Installed in the Field
- ___ -MT Metal Cover, Escutcheon & Stem Handle
- ___ -RC Reverse Connections (For Back-to-Back Installations)
- ___ -SC Pair of Dual Spring Check Valves
- ___ -STH ABS Chrome Plated Handle with Screw and Button
- ___ -WF Wall Mounting Flange For Fiberglass or Panel Wall Installation

STANDARDS

Tested to meet the following standards for valves and plumbing fittings:
ASSE Standard No. 1016
CSA Standard B125-M89
Shower heads meet ANSI A112.18.1
Meets or Exceeds ANSI A117.1M standard for physically handicapped



ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292