

Infra-red Lamps IFW 63 Series	FL-2219	
Rev. 2 (05/06)	Page 1 of 2	

INSTALLATION INSTRUCTIONS for PULL-DOWN INFRA RED MODELS IFW-63 SERIES

ELECTRICAL SPECS:

VOLTS	WATTS	AMPS	HERTZ	PHASE	NEMA
120	250	2.0	60	1	5-15
240	275	1.1	60	1	6-15

Warmer should be installed by an experienced electrician.

U.L. and CSA REQUIREMENTS:


- A. Wires of warmers to be connected to 75°C wire.
- B. Wires are to be installed in conduit.
- C. Warmers are not to be installed any closer than 1" from a wall.
- D. Warmers must be *at least* 16" above a combustible surface.

HOW TO INSTALL: (See figure at right)

NOTE: Outlet box (7) and screws (5) are to be furnished by customer.

- 1. Pull canopy (2) down over coil cord.
- 2. Attach ground wire from ceiling to the "GND" hole in the plate (4) with screw (6).
- 3. Wire the warmer leads to the outlet box (7) leads.
- 4. Attach plate (4) to the outlet box (7) with screws (5).
- 5. Lower or raise the coil cord to the height you want.
- 6. Adjust the tension of the coil cord in the slot as shown.
 - (a) To increase tension, turn slot clockwise.
 - (b) To decrease tension, turn slot counter clockwise.
- 7. Pull up canopy (2) and screw it to the plate (4) with two machine screws (3).
- 8. Screw lamp into socket.



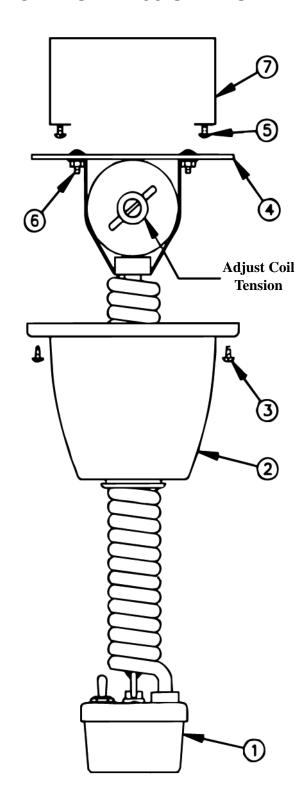

Infra-red Lamps IFW 63 Series	FL-2219
Rev. 2 (05/06)	Page 2 of 2



INSTALLATION INSTRUCTIONS for PULL-DOWN INFRA RED MODELS IFW-63 SERIES


HOW TO INSTALL HOOD:

You will need a Phillips head (preferably magnetic) screwdriver with a long neck.


- 1. Slide the hole in the top of the hood over the socket.
- 2. Look inside of the hood and line up two (2) hood mounting holes with the holes in the arm assembly.
- 3. Put the screw provided on the screwdriver tip and screw loosely into one hole and then into the other; then tighten both screws.
- 4. Screw lamp into the socket.

REPLACEMENT PARTS:

DESCRIPTION	CMP No.
Lamp, Red (120V)	0820-001
Lamp, White (120V)	0820-033
Lamp, Red (240V)	0820-014
Socket	0822-037
Switch (120V)	0808-002
Switch (240V)	0808-122
Reel/Pulley Assembly	1287-084
Coil Cord (IFW 63)	0834-006
Coil Cord (IFW 63L)	0834-007



WIRE FOR 120V

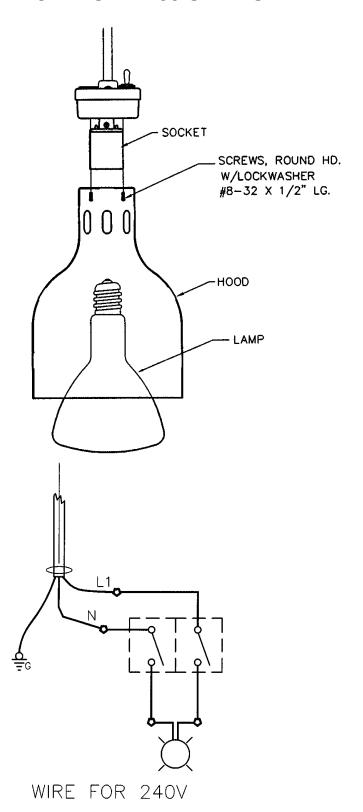

Call Toll-free: 877-CRES COR (273-7267) • Fax: 800-822-0393 • www.crescor.com