


Wire Shelving

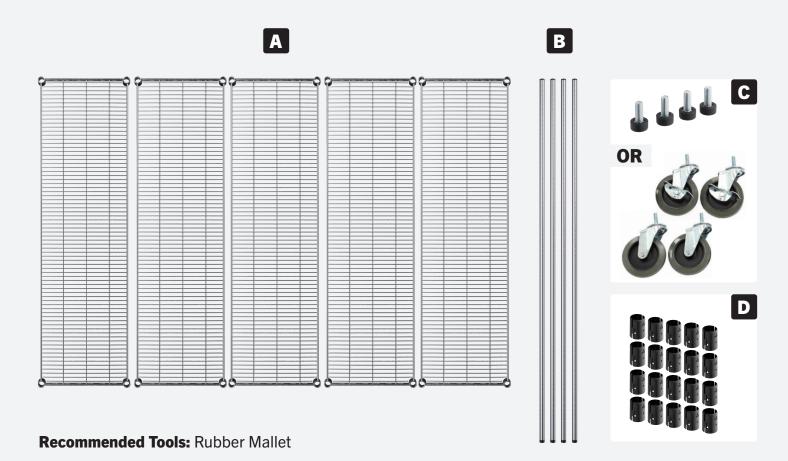

INCLUDED PARTS

- (4-5) Shelves (depending on unit)
- **B** (4) Posts (knock-down)
 - (4) Upper (caps attached)
 - (0-4) Middle (depending on unit)
 - (4) Lower
 - (4-8) Post Connectors (depending on unit)
- C (4) Leveling Feet
 - (4) Casters (in separate box for mobile units)
- (4) Pairs of Sleeves per Shelf
- E (1) Wall Anchoring Kit (not pictured)
 - · Washers, Drywall Anchors, and Screws

FINAL PRODUCT



ASSEMBLING THE SHELVING UNIT

- 1 Check parts list to ensure all parts are included.
- Attach the foot levelers or casters to the lower posts by twisting them in a clockwise direction.

 Note: the upper posts will already have caps attached.



Snap the sleeves onto the grooves on each post. Ensure that the small, tapered side of each sleeve is facing up.



Hold the bottom shelf on its side and slide the top of the four lower posts through the collars in the shelf until the sleeves fit firmly inside the shelf collars.



Stand the unit upright and place the next shelf on top of the posts, sliding them through the shelf collars until the sleeves fit firmly.

Screw the upper posts into the lower posts using the post connectors.



- Add additional split sleeves at desired shelf height and continue to place the remaining shelves on top of the posts, sliding them through the shelf slots until the sleeves fit firmly.
- Press down on each corner of each shelf to secure them in place.

Note: Placing a towel on a shelf then hitting it with a rubber mallet can help secure the shelf in place. Use caution not to damage the unit.



9 Screw the foot levelers in or out to fully level the unit.



If additional security is needed, use the included anchoring kit to attach the unit to the wall.