



Project:

Item Number:

Quantity:

Induction Range: Heavy Duty Countertop

The Vollrath Company, L.L.C.

## INDUCTION RANGE: HEAVY DUTY COUNTERTOP



69523 - High-efficiency, heavy-duty, double element, countertop induction range with push button controls.

**MODELS:** 69523      5.0 kW/5.8 kW @ 208 - 240V  
(Dual Hob - Side-by-Side  
2.5/2.9 kW per Hob)

### DESCRIPTION

The high-efficiency, heavy-duty, countertop induction range is designed for use in commercial kitchens and front-of-the-house cooking. The 5.0 kW/5.8 kW, 208 - 240V range plugs easily into standard 30 amp, 208 - 240V outlets.

The induction range comes complete with a five-foot power cord and plug. The case is made from 18-gauge, 304 stainless steel with vitro ceramic top. The ceramic top is easily cleaned with a mild cleaner.

The induction range is equipped with a variety of safety features including:

- Over-heat protection
- Small-article detection
- Pan auto-detection function
- Empty-pan shut-off

### FEATURES

- High performance with smooth power control from 1% to 100% of output power.
- Sensitive low-end control for cooking sauces, milks and chocolates.
- Temperature Regulation Control.
- Timer for length of cooking control.
- Fast, high temperature cooking.
- High efficiency 90%+.
- Sloped control panel for runoff of liquid spills.
- Push button controls for easy cleaning.
- Heating function for adjustable power settings.
- Rubber feet to prevent slipping of appliance.
- Unit comes with cord and plug and does not require hard wiring.
- Full one-year parts and labor warranty.

### IMPORTANT

- This appliance is intended for use with magnetic induction cookware.
- All models require adequate, unrestricted intake and exhaust air ventilation for proper operation of the controls. The maximum intake temperature must not exceed 110°F (43°C) and the maximum exhaust temperature must not exceed 130° F (54.4° C). Temperatures are measured in ambient air while all appliances in the kitchen are in operation.
- Countertop models require a minimum clearance of 3 inches at the rear and 1 inch at the bottom.

### Agency Listings



This device complies with Part 18 FCC Rules.

### Approvals

<b>Date:</b>
--------------



Setting the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53082-0611  
U.S.A.  
Main Tel: 800.624.2051  
Service Tel: 800.628.0832  
FAX: 800.752.5620


Vollrath of Canada, Ltd.  
6320 Danville Road, Unit 1  
Mississauga, Ontario L5T 2L7  
Canada  
Tel: 905.565.1167  
Tel: 800.695.8560  
FAX: 905.565.1168

## INDUCTION RANGE: HEAVY DUTY COUNTERTOP

**MODELS:** 69523    5.0 kW/5.8kW @ 208 - 240V  
 (Dual Hob Side-by-Side 2.5/2.9 kW per Hob)

### DIMENSIONS

- ❑ Overall dimension: 26.75" wide x 17.9" deep x 5.375" high (67.945 cm x 45.466 cm x 13.653 cm)
- ❑ Shipping dimensions: 33.00" wide x 23.00" deep x 9.00" high (83.820 cm x 58.420 cm x 22.860 cm)
- ❑ Weight of Unit: 44 pounds (19.8 kg)
- ❑ Shipping Weight: 46 pounds (20.7 kg)
- ❑ Dimensions shown in inches (cm)

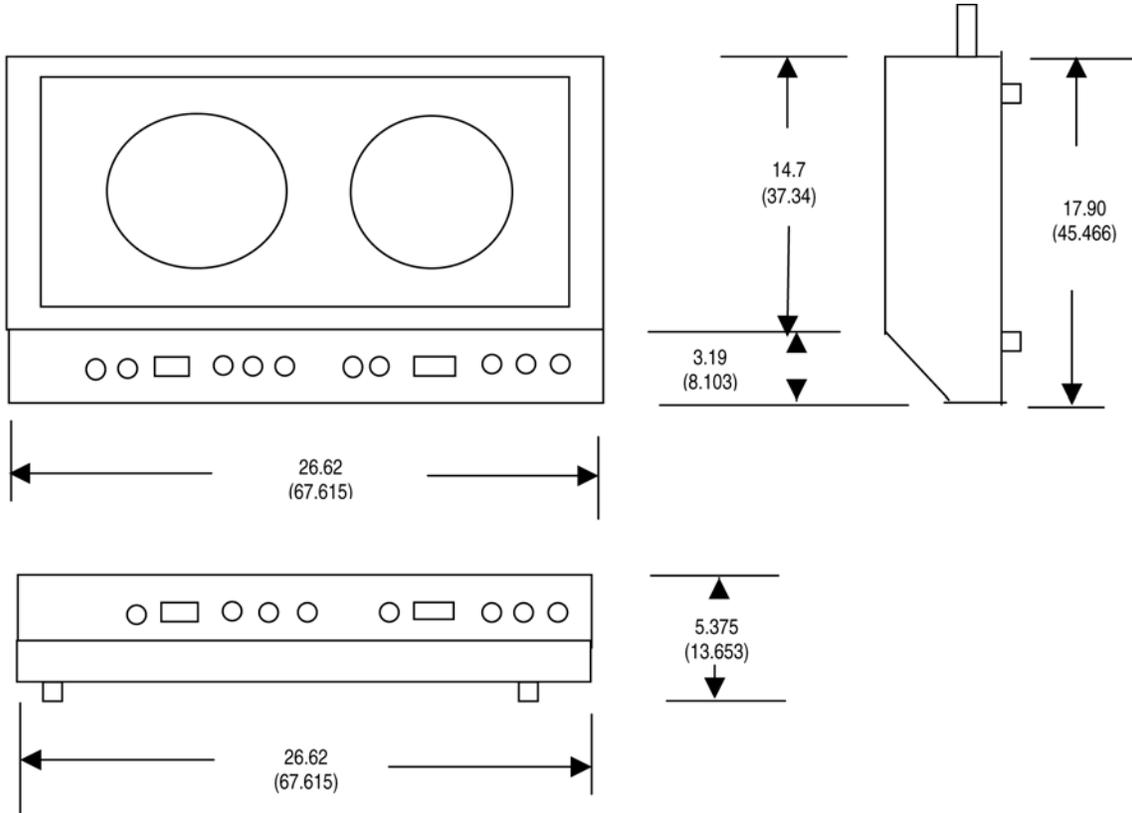


### ELECTRICAL SPECIFICATIONS - 1 PHASE, 60 HZ

Model	kW Rating	Volts	Nominal Amps	NEMA Plug	Remarks
69523	5.0 kW	208V AC	24.2	6-30P	2.5 kW per Hob
	5.8 kW	240V AC			2.9 kW per Hob

- ❑ Electrical connection: Double units require a 30A circuit. Units are supplied with a NEMA 6-30P plug.

#### Receptacle



www.vollrathco.com

The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53082-0611  
 U.S.A.  
 Main Tel: 800.624.2051  
 Service Tel: 800.628.0832  
 FAX: 800.752.5620

Vollrath of Canada, Ltd.  
 6320 Danville Road, Unit 1  
 Mississauga, Ontario L5T 2L7  
 Canada  
 Tel: 905.565.1167  
 Tel: 800.695.8560  
 FAX: 905.565.1168