Quest Elite 2000
2-Flavor Post-Mix Dispenser

Specification Sheet

Features

Wide Product/Ratio Capability
Serves a wide range of post-mix products including, juices and lemonades with pulp, teas and cold coffees within a 3:1 to 8:1 ratio

Patented Mixing System
Delivers consistent quality drinks with no stratification, slugging, or dripping

Frost-free Refrigeration Compartment
Safely accommodates frozen, ambient or aseptic concentrate containers or BIB's

Large 6-8 lbs. Ice Bank
Ample cooling capacity ensures cold drinks during peak demand

Optional Touchless Dispense Kit
Hygienic, touch-free dispense conversion kit available

LED Illuminated Graphics
Back-lit merchandiser attracts customers and reduces energy and maintenance costs

Flexible Merchandiser
The option of single-panel or multi-panel merchandiser— A variety of graphics included

'Sold Out' Indicator
Alerts operator to product-out condition and maximizes sales

Easy to Service
Modular components and accessible cabinet design for ease of serviceability

Narrow Footprint
Conserves counter space

MARMON
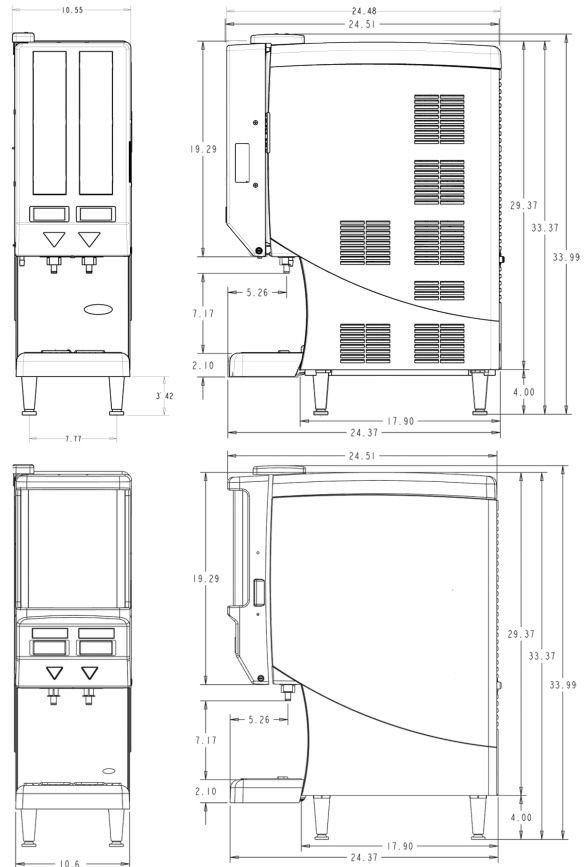Foodservice Technologies
A BERKSHIRE HATHAWAY COMPANY

Technical Specifications

Electrical	115V/60Hz, 230V/50Hz
Refrigerant	R-134A
Ice Bank Size	6-8 lbs.
Operating Conditions	40ºF to 100ºF (4.4º C to 37.8ºC)
Interior Cabinet Dimensions	7.5"W x 9.5"D x 9.0"H (19.5 cm x 24.1 cm x 22.9 cm)
Dispenser Dimensions	10.6"W x 25.0"D x 34.0"H (26.9 cm x 63.5 cm x 86.4 cm)
Recommended Clearance	Top: 12.0" (30.5 cm) Back: 4.0" (10.2 cm) and Sides: 4.0" (10.2 cm)
Weight	Dry: 104 lbs. (47.2 kg) Operating: 136 lbs. (61.7 kg) Shipping: 120 lbs (54.4 kg)
Merchandiser Graphic Size	Single Panel: 11.7"W x 11.1"H (29.7 cm x 28.1 cm) Multi-Panel: 2.9"W x 13.0"H (7.4 cm x 33.9 cm)
Post-Mix Ratio	3:1, 4:1, 5:1, 6:1, 7:1, 8:1
Concentrate Storage	2 - 3.5L bottles
Water Connection	3/8" SAE male flare fitting on dispenser
Water Supply Requirements	Optimum Pressure: 50psi (3.4 bar) flowing 3oz/sec Minimum Static Pressure: 30psi (2.1 bar) Maximum Static Pressure: 60psi (4.1 bar) *For water pressure exceeding the optimum supply specification, flow control set at 50psi is recommended*
Flow Rate	Beverage pour rate 1-2.2oz/sec
Agency Listing	c(UL)us LISTED NSF CE

Item Number	Item Description
721402101JU1	Quest Elite SLJ 2 flavor, illuminated, non-flush, push button 115V/60, single-panel merchandiser
721402101JU2	Quest Elite SLJ, 2 flavor, illuminated, non-flush, push button 115V/60, multi-panel merchandiser
721412111JU1	Quest Elite SLJ, 2 flavor, illuminated, flush portion control, 115V/60, single-panel merchandiser
721412101JU1	Quest Elite SLJ 2 flavor, illuminated, flush, push button 115V/60, single-panel merchandiser
721412201JU1	Quest Elite SLJ 2 flavor, illuminated, flush, push button 230V/50, single-panel merchandiser
721412211JU1	Quest Elite SLJ, 2 flavor, illuminated, flush, portion control, 230V/50, single-panel merchandiser
721412311JU1	Quest Elite SLJ, 2 flavor, illuminated, flush, portion control, 220V/60, single-panel merchandiser
721422211JU1	Quest Elite QLT, 2 flavor, illuminated, portion control, 230V/50, single-panel merchandiser
721422511DE1	Quest Elite QLT, 2 flavor, illuminated, portion control, 230V/50, R-290 single-panel merchandiser
721422511DE2	Quest Elite QLT, 2 flavor, illuminated, portion control 230V/50, R-290, multi-panel merchandiser
720401107	3.5 L Refillable Concentrate Reservoir
729011126	Bag-In-Box Option Kit
729011183	Extender Nozzle Kit
629097998	Touchless Dispense Kit - 2 Flavor
729011218	Portion Control Kit - 2 Flavor
629097144	ADA Installation Kit - 2 Flavor

To learn more about **Cornelius Quest Elite**, visit cornelius.com

MARMON
Foodservice Technologies
A BERKSHIRE HATHAWAY COMPANY