

model **5010.6427SS**

Drinking Faucet

FEATURES & BENEFITS

BUBBLER VALVE

Polished stainless steel cartridge valve which allows for top access stream adjustment as well as cartridge and strainer access, and is designed with a shielded, anti-squirt orifice that provides a steady sanitary source of water.

OPTIONS

For more information, visit <u>www.hawsco.com</u> or call (888) 640-4297.



SPECIFICATIONS

Model 5010.6427SS deck or sink mounted bubbler valve shall include a stainless steel push button bubbler valve with a polished finish, integral stream flow regulation, brushed stainless steel deck flange, and 3/8" IPS inlet.

APPLICATIONS


Perfect for either public or private indoor settings, the 5010.6427SS is a great fit in areas where a sink is present. Specifically, this type of vertically mounted drinking faucet may be placed in settings such as: school classrooms, laboratories, and other facilities where the need for a deck mounted sink/faucet is present. Haws manufactures drinking fountains, faucets and electric water coolers to be lead-free by all known definitions including NSF/ANSI/CAN 61- Section 9, NSF/ANSI/CAN 372, California Proposition 65, and the Federal Safe Drinking Water Act. Product is compliant to California Health and Safety Code 116875 (AB 1953-2006), and NSF/ANSI/CAN 61: $Q \le 0.5$.



NOTES:

TO ADJUST FLOW:

- 1. REMOVE HEX NUT COVER AND PUSH BUTTON COVER.
- 2. ADJUST WITH SCREWDRIVER: CLOCKWISE TO INCREASE FLOW & COUNTER-CLOCKWISE TO DECREASE FLOW.
- 3. IF DESIRED FLOW IS NOT OBTAINED, CLEAN SCREEN AT INLET (SEE 5010.6427SS OPERATION AND MAINTENANCE MANUAL FOR ACCESS INSTRUCTIONS.
- 4. REPLACE PUSH BUTTON COVER AND HEX NUT COVER.

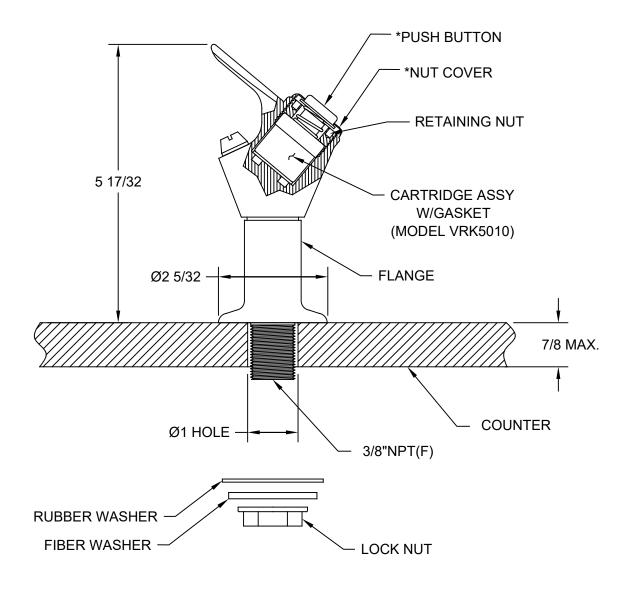

*CHROME PLATED PUSH BUTTON COVER & NUT ARE STANDARD ON 5010.6427SS. COPPER PLATED OPTION IS AVAILABLE AS MODEL PB8C.

