



ELECTRIC

HOT PLATES 31-3/8" DEPTH

IMPERIAL



IHPA-6-36-E

MODEL NUMBERS

IHPA-2-12-E
IHPA-4-24-E
IHPA-6-36-E
IHPA-8-48-E
IHPA-10-60-E

ROUND PLATE ELEMENTS

- 2.6 KW round plate elements with easy to clean flat surface.
- Provides a solid flat surface for fast, even heating.
- Plates are 9" (229) diameter for maximum pan contact.
- Solid top prevents spills from entering unit making clean-up easy.
- Infinite heat controls for maximum cooking flexibility



9" (229 MM) SEALED ROUND
PLATE ELEMENTS WITH EASY TO
CLEAN FLAT SURFACE.



LARGE 5" (127 MM) STAIN-
LESS STEEL LANDING LEDGE
FOR CONVENIENT PLATING.

EXTERIOR FEATURES


- Stainless steel front, top and sides for cleanability and professional look.
- Welded and polished stainless steel seams.
- Range match profile when placed on a refrigerated base or equipment stand.
- Large 5" (127 mm) stainless steel landing ledge is ideal for plating.
- 4" (102 mm) heavy duty legs with adjustable feet.
- One year parts and labor warranty.

IMPERIAL



ELECTRIC

ELECTRIC ROUNDTYPES | HOT PLATES 31-3/8" DEPTH

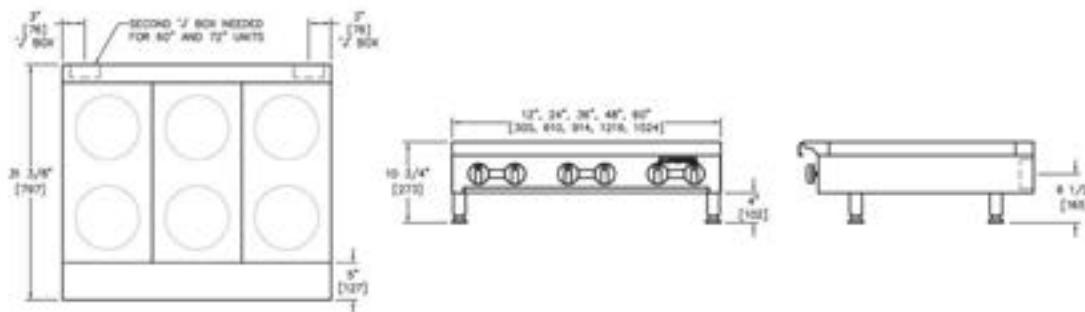

MODEL	WIDTH INCHES (MM)	ROUND ELEMENTS	ELECTRICAL OUTPUT	SHIP WEIGHT (KG) LBS	DIMENSIONS	CRATED DIMENSIONS
IHPA-2-12-E	12" (305)	2	4 KW	(37) 80	12"W X 31-3/8"D X 10-3/4"H (305 X 797 X 273 MM)	14½"W X 35"D X 12"H (368 X 889 X 324 MM)
IHPA-4-24-E	24" (610)	4	8 KW	(64) 140	24"W X 31-3/8"D X 10-3/4"H (610 X 797 X 273 MM)	26½"W X 35"D X 12"H (673 X 889 X 324 MM)
IHPA-6-36-E	36" (914)	6	12 KW	(95) 210	36"W X 31-3/8"D X 10-3/4"H (914 X 797 X 273 MM)	38½"W X 35"D X 12"H (978 X 889 X 324 MM)
IHPA-8-48-E	48" (1219)	8	16 KW	(123) 270	48"W X 31-3/8"D X 10-3/4"H (1219 X 797 X 273 MM)	50½"W X 35"D X 12"H (1283 X 889 X 324 MM)
IHPA-10-60-E	60" (1524)	10	20 KW	(147) 325	60"W X 31-3/8"D X 10-3/4"H (1524 X 797 X 273 MM)	62½"W X 35"D X 12"H (1588 X 889 X 324 MM)

ELECTRICAL REQUIREMENTS

AMPERAGE REQUIREMENTS				
MODEL	TOTAL KW	VOLTS	PH	AMPS
IHPA-2-12-E	5.2	208	1	25
	5.2	208	3	22
	5.2	240	1	22
	5.2	240	3	19
	5.2	480*	3	10
IHPA-4-24-E	10.4	208	3	29
	10.4	240	3	25
	10.4	480*	3	13
IHPA-6-36-E	15.6	208	3	43
	15.6	240	3	38
	15.6	480*	3	19

*Additional charge

MODEL	TOTAL KW	KW 'A'	KW 'B'	VOLTS	PHASE	AMPS	
						J BOX A	J BOX B
IHPA-8-48-E	20.8	10.4	10.4	208	3	29	29
	20.8	10.4	10.4	240	3	25	25
	20.8	10.4	10.4	480*	3	13	13
	36.6	18.3	18.3	208	3	51	51
IHPA-10-60-E	36.6	18.3	18.3	240	3	44	44
	36.6	18.3	18.3	480*	3	22	22

Notes: Measurements in () are metric equivalents.

Must specify at ordering.

ELECTRIC CONVECTION OVEN OPTIONS

- Stainless steel equipment stands
- 6" (152 mm) casters for equipment stands
- 480 volts (additional charge).

CLEARANCE REQUIREMENTS

For use only on non-combustible surfaces. Provide 0" clearance from non-combustible surfaces and 8" (203 mm) from combustible surfaces.



MADE IN USA

