

Project: _____

Item: _____

Quantity: _____

Sheet Pan Racks -Heavy Duty



1330



1461



1331S



1461S



Virtually maintenance free, these all-welded racks are built for the long haul. Each rack is constructed to ensure maximum strength and durability for years to come.

Guides are securely welded both horizontally and vertically, sealing all cracks and crevices that may trap dirt and bacteria. Each guide is welded on both ends, totaling five inches of weld per guide to secure all angles to the upright framework.

Ribbed angle guides allow pans to slide on and off with ease, minimizing the galling or flaking that can occur with heavy usage. (This feature also allows pans to slide on and off smoothly, less friction than if flat angle guides were used.)

- Available in end-loading or side-loading styles, with runner spacing ranging from 1½" to 6".
 - End-Loading units accommodate 18" x 26", 13" x 18", and 14" x 18" pans.
 - Side-Loading units only accommodate 18" x 26" sheet pans.
- Cross braces are reinforced with heavy duty gussets, secured to the uprights and cross braces in order to prevent "racking" by providing additional stability.
- Equipped with 5" plate type casters, wheel hubs are polyolefin with a polyurethane tread that provides additional control during transport and reduces vibrations for a smoother, quieter ride.
- Base is reinforced at each corner with a threaded plate, casters are bolted to these slabs – not the framework. This provides additional strength and stability to the rack, prevents structural damage to the framework, and makes caster replacement easier.
- Five-Year Guarantee against material defects and workmanship.
- Lifetime Guarantee against rust and corrosion.
- NSF Certified.



New Age Industrial Corp., Inc. || NewAgeIndustrial.com || Made in the USA 

PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654 || **Phone: (800) 255-0104 • (785) 877-5121** || Fax: (877)-877-7687 • (785) 877-2616

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time, without notice, to materials and specifications.

APPLICATIONS: General storage and movement of trays and pans.

CONSTRUCTION: Heavy duty, high tensile, extruded aluminum. Type 6063-T5 alloy. Extruded on site.

TRAY SLIDES: Slides are 1¼" x 1⅝" x .100" extruded aluminum angle welded to frame.

Note: Models 1461 and 1461S are constructed using ¾" x ⅝" channel guides, holding pans by the lip only.

FRAME & CROSS SUPPORTS: Vertical and horizontal frame members are 1" x 1" x .070 extruded aluminum tubing. All welded unit.


CORNER GUSSETS: Gussets are 1½" x 1½" x ⅝" thick. Securely welded to the bottom of the inside angle, where horizontal cross braces meet vertical uprights.

CASTERS: Plate type, swivel casters with ball bearing mechanism sealed from dirt and debris. Five-inch wheel has a polyolefin hub with a non-marking polyurethane tread.

NSF Certified.

Sheet Pan Racks

-Heavy Duty

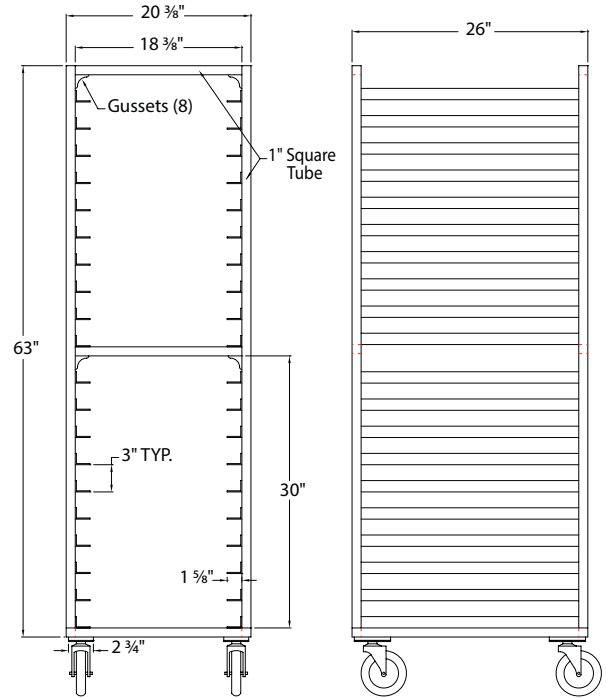

#1331

► Heavy Duty Sheet Pan Rack

Model No.	Size W-H-D	Pan Capacity	Runner Spacing	Ship Lbs.
¾-Size End Loading Rack				
1361	20⅜" x 60⅝" x 26"	17	3"	48
End Loading Rack				
1461*	20⅞" x 69¾" x 26"	38	1½"	56
1330	20⅜" x 69¾" x 26"	30	2"	70
1331	20⅜" x 69¾" x 26"	20	3"	56
1332	20⅜" x 69¾" x 26"	15	4"	52
1333	20⅜" x 69¾" x 26"	12	5"	48
1334	20⅜" x 69¾" x 26"	10	6"	43
Side Loading Racks				
1461S*	28⅜" x 69¾" x 19"	38	1½"	48
1330S	28⅜" x 69¾" x 19"	30	2"	58
1331S	28⅜" x 69¾" x 19"	20	3"	50
1332S	28⅜" x 69¾" x 19"	15	4"	46
1333S	28⅜" x 69¾" x 19"	12	5"	46
1334S	28⅜" x 69¾" x 19"	10	6"	46

Four 5" plate type swivel casters (#C450).

* #1461 & #1461S Units Hold Pans By The Lip Only on a ¾" x ⅝" channel.

OPTIONS:

Standard Unit Options:

- ☐ **Caster Locks (2)** - Add "CL" suffix to model #.
- ☐ **Corner Bumpers (4)** - Add "B" suffix to model #.
- ☐ **Solid Base** - Add "E" suffix to model #.
- ☐ **Caster Upgrade (6" casters)** - Add "M6" suffix to model #.
- ☐ **Medical Caster Upgrade** - Add "MD" suffix to model #.
- ☐ **Vertical Bumpers (4)** - Add "VB" suffix to model #.
- ☐ **Perimeter Bumper** - Add "PB" suffix to model #.
- ☐ **Prison Package** (tamper resistant screws) - Add "PP" suffix to model #.
- ☐ **Pan Stop** - Add "PS" suffix to model #.

☐ **Knocked-Down Units** - Add "KD" suffix to model #.

- Four 5" stem type swivel casters (#C480)

- **NOTE:** This option is not available for model #1461, #1461S or #1361.

Options:

- ☐ **Caster Locks (2)** - Add "CL" suffix to model #.
- ☐ **Vertical Bumpers (4)** - Add "VB" suffix to model #.



All sheet pan racks quoted hold USA standardized 18 x 26" sheet pans (17½ x 25½" actual). We are not responsible for pans that do not meet the industry standard, which may not fit our racks.

New Age Industrial Corp., Inc. || NewAgeIndustrial.com || Made in the USA

PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654 || **Phone: (800) 255-0104 • (785) 877-5121** || Fax: (877)-877-7687 • (785) 877-2616

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time, without notice, to materials and specifications.