

KM-101BAH 04/25/17 Item # 13209

WxDxH 233/4" x 241/4" x 39"* *including 6" legs

> KM-101BAH ★ Air-Cooled





















Features

- Individual crescent cube
- Stainless steel evaporator
- ► CycleSaver™ design CycleSaver



- Up to 115 lbs. of ice production per 24 hours
- · Up to 53 lbs. of built-in storage capacity
- · Durable stainless steel exterior
- · Front in, front out airflow
- · Slide in door
- · Removable air filter
- Power switch accessible without panel removal
- · Built-in installation possible
- EverCheck[™] alert system
- · R-134a Refrigerant
- Optional Drain pump assembly HS-5061

Warranty:


3 Year Parts & Labor on entire machine. 5 Year Parts & Labor on Evaporator.

5 Year Parts on Compressor; air-cooled condenser coil. 1 Year - HS-5061 Drain Pump Assembly - Parts & Labor.

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

			ICE PRODUCTION			WATER USAGE		ELECTRICAL							
	Condenser	Model	Air / Water Temp Lbs. per 24 hours 70°/50°F 90°/70°F		Per (r Cycle Potable Gal. per 100 Cubes 90°/ 70°F		Condenser Gal. per 100 lbs. 90°/ 70°F	kWh Used per 100 lbs. 90°/70°F	Max. Fuse Size or HACR Circuit Breaker	Amperage	Voltage	Heat Rejection BTU/hr.	Shipping Weight	ENERGY STAR®
I	Air-Cooled	KM-101BAH	115	88	2.31	110	23.0	N/A	9.4	15A	5.2A	115V/60/1	1,950	143 lbs.	*

KM Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits

· Ambient Temp Range 45 - 100°F Water Temp Range 45 - 90°F · Water Pressure 10 - 113 PSIG · Voltage Range 104 - 127V

Service

· Allow enough space at rear for water supply and drain connections, at least 12" (30 cm) clearance at front and at least 0.6" (15 mm) clearance at top for mainenance.

Plumbing


- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Hoshizaki reserves the right to change specifications without notice.


Printed in the U.S.A.



mm [inch]

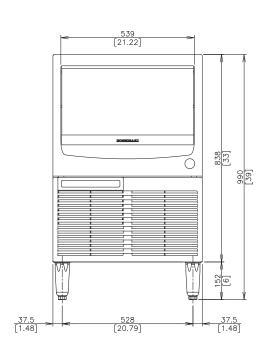





SIDE VIEW

