



NORDIC CCM1848 SERIES

MODULAR CUBED ICE MAKER



Ice maker shown on B1048SS bin



FEATURES:

- Produces up to 1954 lbs. (888 Kgs.) of ice per day
- Constructed from corrosion-resistant stainless steel
- Built in Agion Antimicrobial product protection effective against mold, mildew and fungus
- Ultra-low profile – only 26 inches (660 mm) tall
- Harvest assist reduces utility consumption
- Choice of full or half cube size
- No air filter to clean or replace

Protected by Agion



Nature's antimicrobial

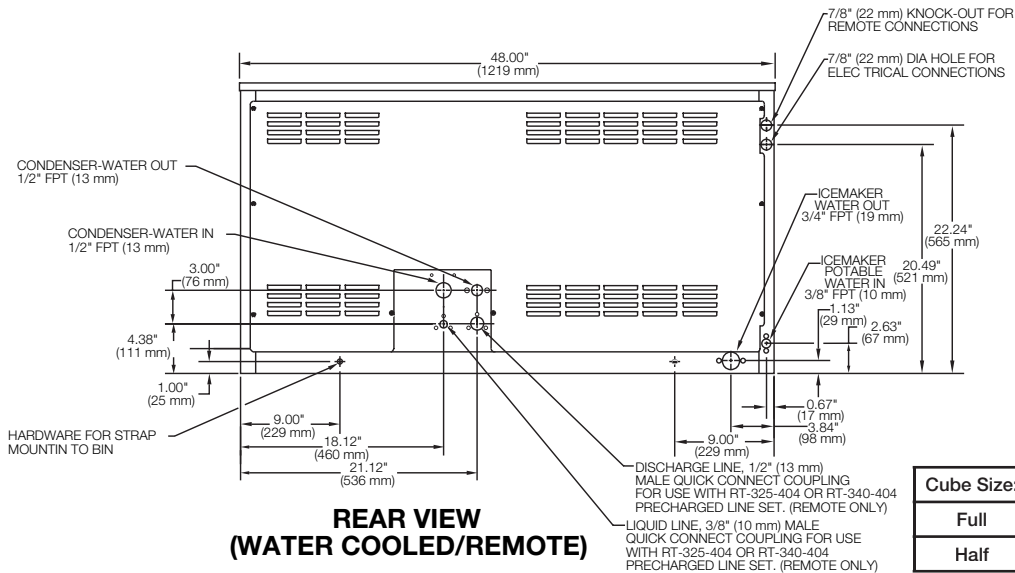

Cube Size:	Width	Depth	Height
Full	7/8" (22mm)	7/8" (22mm)	7/8" (22mm)
Half	3/8" (10mm)	7/8" (22mm)	7/8" (22mm)

MODEL NO.	Cond. Unit	Ice Prod. per 24 hrs. at 70° Air / 50° Water lbs. (Kgs.)	Ice Prod. per 24 hrs. at 90° Air / 70° Water lbs. (Kgs.)	Water Used-Gals. (Ltrs.) per 100 lbs. of ice 90° Air / 70° Water		Kilowatts Used per 100 lbs. of ice 90° Air / 70° Water	Heat Rejection (Btuh)	Electrical Rating	Min. Circuit Amp.
				Ice Prod. Use	Cond. Use				
CCM1848W*2	Water	1954 (888)	1776 (807)	24.1 (91)	139.5 (528)	3.6	29636	208-230/60/1	17.0
CCM1848R*2	Remote	1770 (805)	1509 (686)	20.85 (79)	n/a	4.9	28719	208-230/60/1	22.2
CCM1848W*3	Water	1872 (851)	1556 (707)	20.1 (76)	150.5 (570)	4.3	33179	208-230/60/3	10.7
CCM1848R*3	Remote	1938 (881)	1491 (678)	19.3 (73)	n/a	4.7	27966	208-230/60/3	15.5

MODEL NO.	Description	Shipping Weight lbs. (Kgs.)
RC18002	Remote Condenser for 1 model CCM1848R (208-230/50-60/1/3 voltage)	155 (71)
RT25	25 ft. (7.6m) Precharged Tubing Kit for R-404A models	13 (6)
RT40	40 ft. (12m) Precharged Tubing Kit for R-404A models	18 (8)
RT60	60 ft. (18.2m) Precharged Tubing Kit for R-404A models	26 (12)

See Bin specification sheet for information on ice storage bins.
 * Represents cube size. For full cube substitute an "F", for half cube substitute an "H".
 90° / 70° figures are rated in accordance with ARI Standard 810.

NUMBER OF WIRES 3 or 4
 MAX. FUSE SIZE 15 or 30
 RECOMMENDED BREAKER SIZE 15, 20 or 25
 SHIPPING WEIGHT LBS (KGS.) . . 375 (170)

AGENCY LISTINGS

OPERATING LIMITS

Ambient Temp. Range Water	50° - 110°F (10° - 43°C)
Air Temp. Range Remote	-20° - 100°F (-29° - 43°C)
Water Temp. Range	40° - 100°F (4.5° - 38°C)
Water Pressure Ice Maker Water in	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)
Condenser Inlet Water (Water cooled only)	Min. 20 psi (1.4 bar)
	Max. 60 psi (6.9 bar)



IN THE U.S.A. Ph: 800.238.3600 Fax: 763.488.4283
 OUTSIDE THE U.S.A. Ph: 763.488.8200 Fax: 763.488.4283
 101 Broadway Street West Osseo, MN 55369 www.cornelius.com