



### Standard Features:

- Built - in front grease trough.
- Large capacity removable grease can.
- Aluminized steel burners, one every 12".
- 24,000 BTU/HR. per burner.
- 3/4" gas regulator.
- 1" thick cold rolled steel plate.
- 4" legs with adjustable feet.
- 14 gauge splash guard.
- Stainless steel landing ledge.
- Thermostat control 100° F(L) - 450° F (Hi).

### Combination griddle/open burner models:

- One piece, cast iron removable open top grate.
- Two cast iron satellite burners.
- 20,000 BTU/HR per burner.
- Individual burner controls.
- Large capacity removable drip pan.

### Optional Features:

- Black painted equipment stand.
- Stainless steel equipment stand.
- Casters on stand - swivel type.

### Type of Gas

- Natural
- Propane
- Elevation above 2,000 feet - specify \_\_\_\_\_ ft.



## MODELS AVAILABLE

MODEL NO.	DESCRIPTION	TOTAL BTU		SHIPPING INFORMATION		
		Nat/Gas	Pro/Gas	LBS.	KG	CUBE DIMENSIONS (L x D x H)
<b>Manually Controlled Standard Griddle (1" steel plate)</b>						
GXT2	Cooking Surface 22" x 24"	48,000	48,000	255	116	30" x 40" x 28"
GXT3	Cooking Surface 22" x 36"	72,000	72,000	360	163	42" x 40" x 26"
GXT4	Cooking Surface 22" x 48"	96,000	96,000	441	200	54" x 40" x 26"
GXT5	Cooking Surface 22" x 60"	120,000	120,000	578	262	66" x 40" x 26"
GXT6	Cooking Surface 22" x 72"	144,000	144,000	700	318	78" x 40" x 26"
<b>Manually Controlled Combination Griddle/Open Burner (1" steel plate)</b>						
GX1(2)T-2	Griddle Surface 22" x 24" - 2 Open Burners	88,000	83,000	320	145	42" x 40" x 26"
GX1(3)T-2	Griddle Surface 22" x 36" - 2 Open Burners	112,000	107,000	430	195	54" x 40" x 26"
GX1(4)T-2	Griddle Surface 22" x 48" - 2 Open Burners	136,000	131,000	570	259	66" x 40" x 26"
GX1(5)T-2	Griddle Surface 22" x 60" - 2 Open Burners	160,000	155,000	637	289	78" x 40" x 26"
GX1(6)T-2	Griddle Surface 22" x 72" - 2 Open Burners	184,000	179,000	770	349	90" x 40" x 26"

For USA, Contact:  
 Garland Commercial Industries,  
 Tel: 570-636-1000  
 Fax: 570-636-3903

For United Kingdom & Ireland, Contact:  
 Enodis.  
 Tel: 0181-561-0433  
 Fax: 0181-848-0041

For Canada & the Rest of the World, Contact:  
 Garland Commercial Ranges, Ltd.  
 Tel: 905-624-0260  
 Fax: 905-624-5669



Item #: \_\_\_\_\_  
 Product Name: Thermostat Controlled Griddles  
 Standard & Combination

**SHORT FORM SPECIFICATIONS**


Shall be Garland Thermostat Controlled Standard or Combination Griddle with Open Top Burner. Model \_\_\_\_\_ with total BTU/Hour rating of \_\_\_\_\_ when used with natural/propane gas. Finish is to be stainless steel front and sides.

**MANUALLY CONTROLLED STANDARD GRIDDLES SPECIFICATIONS**




Description	SERIES				
	GXT2	GXT3	GXT4	GXT5	GXT6
Width	24"	36"	48"	60"	72"
Depth	28"	28"	28"	28"	28"
Height	16 3/4"	16 3/4"	16 3/4"	16 3/4"	16 3/4"
No. Burners	2	3	4	5	6
BTU/Hour/Natural/Propane	48,000	72,000	96,000	120,000	144,000
Griddle Plate Size (W x D x Thickness)	24" x 22" x 1"	36" x 22" x 1"	48" x 22" x 1"	60" x 22" x 1"	72" x 22" x 1"
Gas Manifold	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT

**MANUALLY CONTROLLED STANDARD GRIDDLE/OPEN BURNER SPECIFICATIONS**



Description	SERIES				
	GX1(2)T-2	GX1(3)T-2	GX1(4)T-2	GX1(5)T-2	GX1(6)T-2
Width	36"	48"	60"	72"	84"
Depth	28"	28"	28"	28"	28"
Height	16 3/4"	16 3/4"	16 3/4"	16 3/4"	16 3/4"
No. Burners	3	4	5	6	6
BTU/Hour/Natural/Propane	88,000	112,000	136,000	160,000	184,000
Griddle Plate Size (W x D x Thickness)	24" x 22" x 1"	36" x 22" x 1"	48" x 22" x 1"	60" x 22" x 1"	72" x 22" x 1"
Gas Manifold	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT

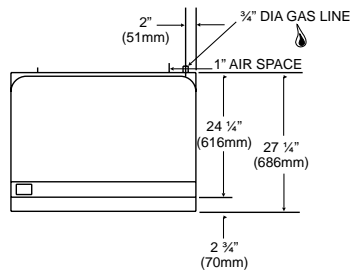

Standard Griddle

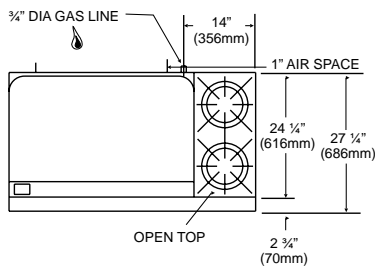

Combination Griddle/Open Burner

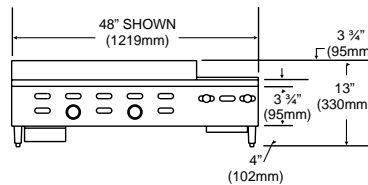

**NOTE:**

- Many local codes exist, and it is the responsibility of the Owner and the Installer to comply with those codes.
- Garland reserves the right to change or improve our specifications without notification.
- These appliances are intended for commercial use by professionally trained personnel.

Continuous product improvement is a Garland policy. Specifications and designs are subject to change without notice.