


MSLA012MB CONDENSING UNIT



Note: Pictures are for illustration only,
and may not reflect the listed model.

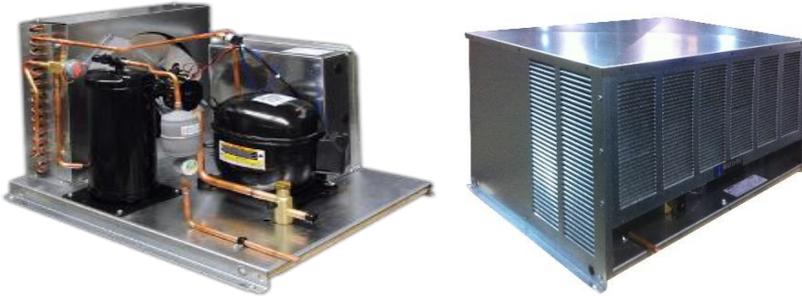

GENERAL						
REFRIGERANT	VOLTAGE	COMPRESSOR TYPE	COMPRESSOR MODEL	HP	AWEF	LISTINGS
R-454A	208-230/60/1	Scroll	YF04KAE-PFV	1.25	2.95	UL/CUL

BTUH CAPACITY (At Saturated Suction Temperature (SST) and 90° Ambient at Condenser)							
-30	-20	-10	20	25	30	35	45
3,198	4,165	5,358	-	-	-	-	-

BTUH CAPACITY (At Saturated Suction Temperature (SST) and 100° Ambient at Condenser)							
-30	-20	-10	20	25	30	35	45
2,750	3,707	4,769	-	-	-	-	-

DIMENSIONAL DATA					
OVERALL (to nearest inch)			WT (lbs)	BASE SIZE	BASE/HOOD
L	W	H			
38	27	18	240	M2	O21M

INSTALLATION				
REFRIGERANT	RECEIVER TANK (lbs) 90%/90°F	CONNECTIONS		ESTIMATED TOTAL HEAT REJECTION (BTUH)
		LIQUID	SUCTION	
R-454A	10.1	3/8	7/8	7,647

ELECTRICAL							
MCA	MOP	COMP VOLTS	COMP PHASE	COMP HZ	COMP RLA	COMP LRA	OTHER LOAD DATA
14.1	15	208-230	1	60	6.6	40.3	
FAN PHASE	FAN HZ	FAN FLA	FAN HP	FAN QUANTITY	MAX EVAP FAN AMPS	MAX EVAP DEF HEATER AMPS	PHASE 1
1	60	0.67	1/20	2	4	12.0	AMPS 0.5

