

Single Control Cast Lavatory Faucets

TECK[®]
COMMERCIAL



Specification: (example)

- **CAST BRASS** centerset faucet
 - Single control, 102mm (4") centers
 - Polished chrome plated finish
 - Ceramic cartridge with rotational limit stop
 - Metal hold-down package
 - Vandal resistant 89mm (3 1/2") ADA compliant lever handle with color index
- and ...
with ... (add product variation required)
with ... (add outlet required)

22C101



22C601

Specification: (example)

- **CAST BRASS** single control lavatory faucet
- Single hole mount Metal hold-down package
- Polished chrome plated finish
- Ceramic cartridge with rotational limit stop
- Vandal resistant 89mm (3 1/2") ADA compliant lever handle with color index, and ... with ... (add product variation required) with ... (add outlet required)

Engineer/Architect Approval

Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.		
Single Control Centerset Faucet	22C		1



PRODUCT VARIATION	OUTLET	HANDLE
<p>0 102mm (4") Centerset Less Pop-up (with Pop-up hole) </p> <input checked="" type="checkbox"/>	<p>0 Vandal Resistant Outlet (Wrench Flats) 1.5 USGPM (5.7 L/min.) </p> <input checked="" type="checkbox"/>	<p>0</p> <input type="checkbox"/>
<p>1 102mm (4") Centerset Less Pop-up (No Pop-up hole) </p> <input type="checkbox"/>	<p>1</p> <input type="checkbox"/>	<p>1 89mm (3-1/2") ADA Compliant Lever Handle </p> <input type="checkbox"/>
<p>2</p> <input type="checkbox"/>	<p>2 Vandal Resistant 1.5 USGPM (5.7 L/min.) Laminar w/Agion[®] Antimicrobial </p> <input type="checkbox"/>	<p>2</p> <input type="checkbox"/>
<p>3 102mm (4") Centerset with Metal Pop-up </p> <input type="checkbox"/>	<p>3 Vandal Resistant 1.5 USGPM (5.7 L/min.) Flow Control Aerator </p> <input type="checkbox"/>	<p>3</p> <input type="checkbox"/>
<p>4 102mm (4") Centerset with Open Grid Strainer (No Pop-up hole) </p> <input type="checkbox"/>	<p>4 Standard 1.5 USGPM (5.7 L/min.) Flow Control Aerator </p> <input type="checkbox"/>	<p>4</p> <input type="checkbox"/>
<p>5 102mm (4") Centerset with Offset Grid Strainer (No Pop-up hole) </p> <input type="checkbox"/>	<p>5 Vandal Resistant 0.5 USGPM (1.9 L/min.) Flow Control Non-Aerating Spray Outlet </p> <input type="checkbox"/>	<p>5</p> <input type="checkbox"/>
<p>6 Single Hole Mount Less Pop-up (No Pop-up hole) </p> <input type="checkbox"/>	<p>6</p> <input type="checkbox"/>	<p>6</p> <input type="checkbox"/>
<p>7</p> <input type="checkbox"/>	<p>7</p> <input type="checkbox"/>	<p>7</p> <input type="checkbox"/>
<p>8 Single Hole Mount with Metal Pop-up </p> <input type="checkbox"/>	<p>8</p> <input type="checkbox"/>	<p>8</p> <input type="checkbox"/>
<p>9 Single Hole Mount with Open Grid Strainer (No Pop-up hole) </p> <input type="checkbox"/>	<p>9</p> <input type="checkbox"/>	<p>9</p> <input type="checkbox"/>

Refer to www.specselect.com for individual models.


Flow Rates are at 60 PSI.
Note: Use this page front and back as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-22C Rev. C

Approvals:

- CSA certified
 - Complies to ASME A112.18.1
 - Complies to ASME A112.18.6 for Flex Connector Models
 - ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
 - Verified compliant with .25% weighted average Pb content regulations
- (Contact Delta Representative for State and/or Local Approvals.)

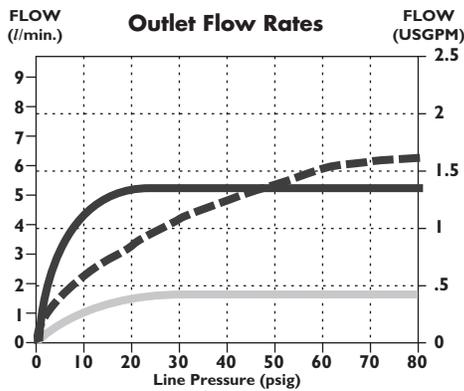
FLOW RATE vs PRESSURE

Spout Outlets

- No. 0 & 2 Outlet
- No. 3 & 4 Aerator
- No. 5 Low Flow Outlet

OUTLET NO.	"D"	
	mm	in.
0	7	0.28
2	11	0.45
3	11	0.45
4	11	0.45
5	11	0.45


Note: Measurements may vary ± 6mm (0.25")

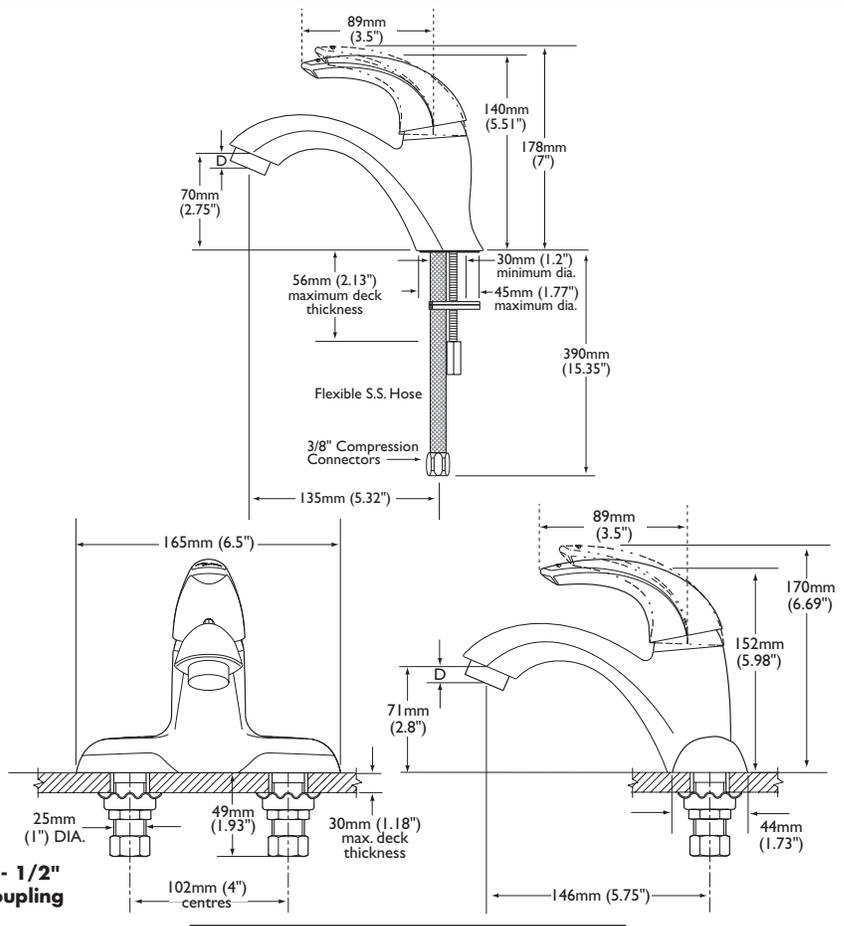Refer to www.specselect.com for individual models.




INLETS - 1/2" MIP/Coupling Nuts


METAL POP-UP
(supplied with Product Variation 3 and 8)

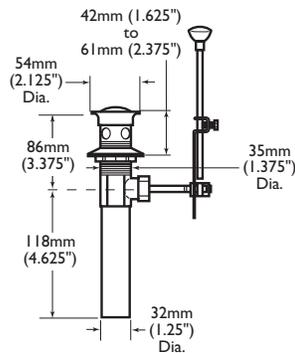

OPEN GRID STRAINER
(supplied with Product Variation 4 and 9)

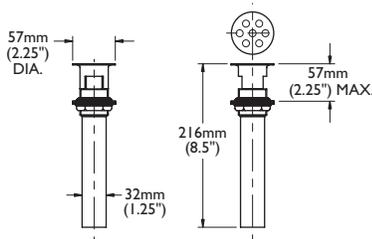

OFFSET OPEN GRID STRAINER
(supplied with Product Variation 5)

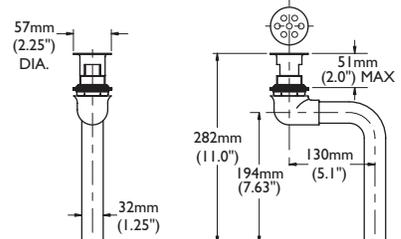

Note: Use this page front and back as a product submittal sheet.