# DESIGNER LINE REFRIGERATOR

# **Model: D1RENPTHD**

Natural Refrigerant R-290 Model



# 1-Section Extra-Wide Pass-Thru Refrigerator with Half Doors



ENERGY STAR® Qualified Commercial Refrigerator

**D1RENPTHD** - Stainless steel front, aluminum end panels and interior **D1RENSAPTHD** - Stainless steel exterior, aluminum interior

**D1RENSSPTHD** - Stainless steel exterior and interior



## **Options and Accessories**

(upcharge and lead times may apply)

(4)-1-3-1-1	
Stainless steel case back	Full doors
Add'l epoxy-coated steel shelves	Hinged glass doors (consult factory)
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Rehinging of doors (consult factory)	Correctional Facility Options
Pan slide assemblies	One way security screws
Wine rack	Locking hasp (lock not included)
Casters	Stainless steel mesh cover
Custom laminates	Coverless hinges

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Lucation.		
Item No:	Quantity:	
	•	
ΔΙΔ #·	SIS #·	

# **Standard Model Features**

#### REFRIGERATION SYSTEM

Self contained, performance-rated "plug" refrigeration system

Natural, environmentally-safe, high-efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

# **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in door gaskets

Cylinder lock in each door

Heavy-duty, epoxy-coated steel shelves

Adjustable 6" stainless steel legs

# **MODEL FEATURES**

LED interior lighting

Electronic controller w/digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

# **Model Specifications**

# **DIMENSIONAL DATA** Net

Dimizitoronia Dimin	
Net Capacity (cu. ft.)	22 (623 cu l)
Width, Overall (in.)	28 1/2 (724 mm)

38 3/4 (984 mm) Depth, Overall (in.) (incl. handles)

Depth (in.) (less doors) 32 (813 mm)

Depth (in.) (doors open 90°) 79 (2007 mm)

Clear Door Width (in.) 21 7/8 (556 mm) Clear Half Door Height (in.) 27 1/2 (699 mm)

83 1/4 (2115 mm) Height, Overall (in.) (incl. 6" legs)

No. of Doors No. of Shelves 3

Shelf Area (sq. ft.) 20.4 (1.9 sq m)

Tray Slide Capacity (per half section) 11

## **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/4+
Capacity (BTU/Hr)*	1940

## **ELECTRICAL DATA**

Voltage (int'l)	115/60/1 (220/50/1)
Feed Wires (incl. ground)	3
Total Amps (int'l)	5.2 (3.5)
10 ft. Cord/Plug [attached] (int'l)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (in.)	85 1/2 (2172 mm)
Width - Crated (in.)	31 5/8 (803 mm)
Depth - Crated (in.)	42 (1067 mm)
Volume - Crated (cu. ft.)	65 (1841 cu I)
Weight Std - Crated (lbs.)	370 (168 kg)
Weight SS - Crated (lbs.)	390 (177 kg)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









#### © Copyright 2019. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

# **Model Plan Views**

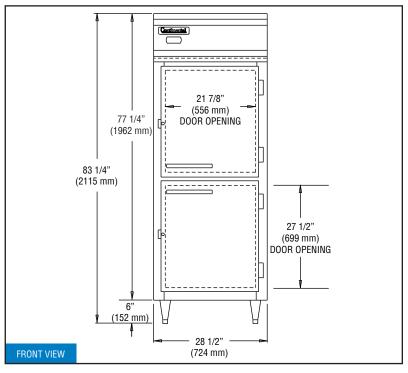

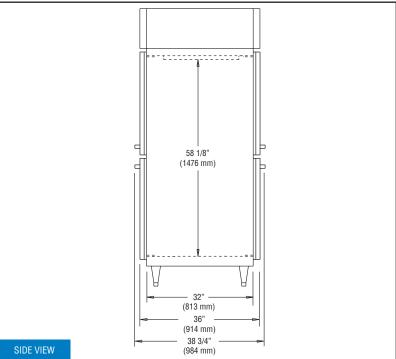

IMPORTANT NOTE: If the cabinet is located under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides.