

SR52G Super Runner Gas Fryer

Project
Item
Quantity
CSI Section 11400
Approval
PP -
Date

Models

☐ SR52G



Shown with optional casters.

Standard Features

- 35-50-lb (17-25 liter) frypot oil capacity
- 120,000 Btu/hr. input
- Thermo-tube design
- Stainless steel frypot, front, door, and backsplash/flue cover, aluminized sides
- Wire form basket hanger and two fry baskets
 5.375" x 6.375" x 12.06" (13.65 x 16.19 x 30.63 cm) insulated handles
- Wide cold zone
- Millivolt pilot system requires no electrical hookup
- 6" (15 cm) adjustable steel legs

Options & Accessories

- ☐ Stainless steel sides
- ☐ Casters -- set of 4

Specifications

Basic Frying At Its Best -- Designed For All-Purpose Usage

Maximize your profits by combining more efficiency with more capacity in this all-purpose, affordable fryer.

Fry a wide variety of products with the full size 14" x 14" (35 x 35 cm) fry area which easily accommodates items from french fries to main entree menu selections.

Make the most of your energy dollars with our exclusive Thermo-Tube design. The heating tubes provide a large oil contact surface. Controlled flow tube baffles maximize oil heat absorption. As a result, more energy is transferred to the oil and less goes unused up the vent. The benefits are quick heat-up time, low idle costs and low gas consumption per load of product cooked. The 1.25" (3.175cm) drain valve makes cleaning fast and easy.

Minimize costly oil usage with the SR52 which utilizes only 35-50 lbs. (17-25 L) of oil for optimum cooking efficiency with a cook depth of 4.50 inches. Plus, Dean's wide cold zone design protects oil integrity by trapping debris under the cooking area, preventing carbonization of particles and wasteful oil deterioration.

Assure rapid recovery with Dean's accurate mechanical thermostat which reduces time lost between loads and requires no electrical hookup.

Invest in a product built to last with Dean's SR52 fryers which achieve long and dependable life through simplicity of design -- durable stainless steel baffles and rugged cast iron burners keep maintenance to a minimum.










5489 Campus Drive Shreveport, LA 71129 USA Tel: 318-865-1711
Tel: 1-800-221-4583
Fax: 318-868-5987

E-mail: info@dean.enodis.com

http://dean.enodis.com

Bulletin No. 830-0057 11/07 Litho in U.S.A. ©Frymaster, LLC Enodis



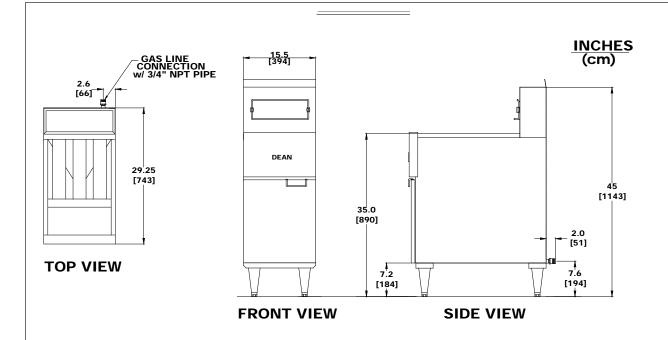

DIMENSIONS

MIN./MAX. OIL CAPACITY	OVERALL SIZE (cm)				DRAIN	DRAIN	NO.	FRYING	APPROXIMATE SHIPPING DIMENSIONS				
	WIDTH	DEPTH	OVERALL HEIGHT	WORK HEIGHT	(cm)	VALVE HEIGHT (cm)	OF TUBES	AREA (cm)	CLASS	SHIPPING lbs./cu.ft. (kg/m³)	DI	MENSIONS (cm)	;
35-50 lbs. (17-25 L)	15.50" (39)	29.25" (74)	45" (114)	35" (89)	1.25" (3.175)	17.5" (44)	4	14 x 14" (35 x 35)	85	180 lbs./15 (82/0,42)	H 48.5" (123)	W 20.5" (52)	L 36" (91)

POWER REQUIREMENTS

NATURAL OR LP GAS	GAS	ELECTRICAL		
INPUT RATING	CONNECTION	REQUIREMENT		
120,000 BTU/hr. (30,600 kCal/hr.) (35.2 kW)	3/4" N.P.T. regulator not required	NONE		

SHORT TERM SPECIFICATION

Shall be DEAN free-standing cool zone deep fat fryer, Model SR52G. Only 15.50" (39 cm) wide, 35-50# (17-25 L) oil capacity, requiring 120,000 BTU (30,600 kcal/hr.) (35.2 kW) natural or LP gas input (3/4" N.P.T. connection) and mechanical controls.

ORDERING DATA

Please specify: Natural or propane gas Altitude -- if above 2000 ft. (610 m)

NOTE:

DO NOT CURB MOUNT.

5489 Campus Drive Shreveport, LA 71129 USA Tel: 318-865-1711

Tel: 1-800-221-4583

Fax: 318-868-5987

E-mail: info@dean.enodis.com

http://dean.enodis.com

Bulletin No. 830-0057 11/07 Litho in U.S.A. ©Frymaster, LLC Enodis