


206ST/D BUILT-IN WARMER

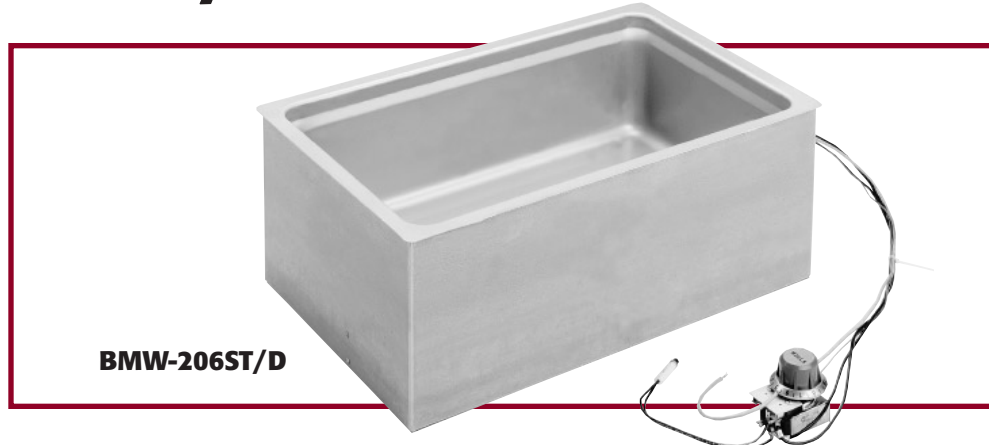

BMW-206ST/D

Wells BMW-206ULST built-in "square corner" food warmer is designed for quick and easy bottom mount installation, providing an unobstructed, clean countertop. These dependable units have "square corners" and are made with heavy-duty stainless steel. They are fully insulated and will accommodate a standard 12" x 20" steam table pan up to six inches deep.

206ST/D BUILT-IN WARMER

Specifications

Overall Dimensions:	Inches	MM
Width	13 11/16	348
Depth	21 13/16	554
Temperature Settings:	OFF/LO to HI	
Weights:	Lbs.	KG
Installed	18	8
Shipping	22	10

Features

- **Warming pan is deep drawn, stainless steel** for maximum strength and durability.
- **Control** is recessed in a one piece, die stamped stainless steel, remote panel to help prevent accidental temperature changes.
- **The tubular element**, located under the warming pan, allows for quick heating.
- **The positive-off thermostat (T)** controls the element allowing for adjustable and more consistent temperatures. A signal light indicates that the heating element is energized.
- **Fully insulated** for greater efficiency.
- Warmers are designed for **wet or dry operation**.
- Models available with **optional drain (D)**.
- The BMW-206ULST warmer is **Underwriter's Laboratories, Inc. LISTED** and meets NSF International and Canadian standards.
- **A one-year warranty** against defects covers parts and labor.

Accessories

Adapter Top, to convert warmer to hold two 7-quart insets, 20176

Adapter Top, to convert warmer to hold two 4-quart insets and two 2 1/2-quart insets, 20434

Adapter Top, to convert warmer to hold one 7-quart and one 11-quart inset, 21621

Adapter Top, to convert warmer to hold three 4-quart insets, 21615

Adapter Top, to convert warmer to hold four 2 1/2-quart insets, 21624

Adapter Top, to convert warmer to hold one 4-quart and one 7-quart inset, 21617

Inset, 2 1/2-quart capacity with lid, 20773

Inset, 4-quart capacity with lid, 20774

Inset, 7-quart capacity with lid, 20587

Inset, 11-quart capacity with lid, 20908

Optional Drain (D) is available


Drain Valve Extension Kit, extension from drain to counter front with remote handle, for use with "D" models only, 20385






MODEL BMW-206ST BUILT-IN WARMER

DIMENSIONS:

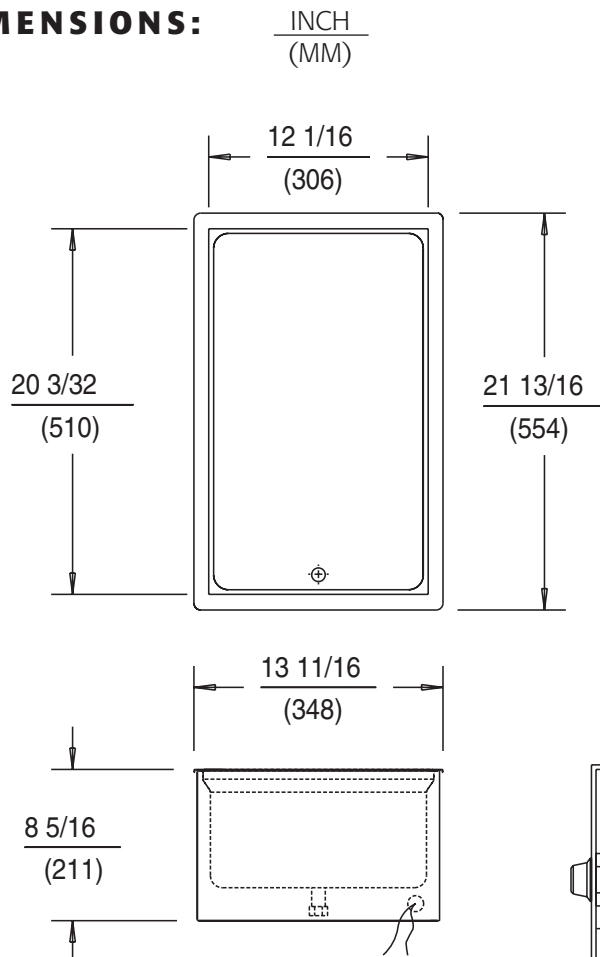

SUGGESTED CLEARANCE FROM UNIT TO THE NEAREST SURFACE			
BACK	SIDE	BOTTOM	FRONT*
1 (25)	1 (25)	6 3/4 (171)	4 1/8 (105)

* When control box is located below the unit, front clearance can be 2 inches.

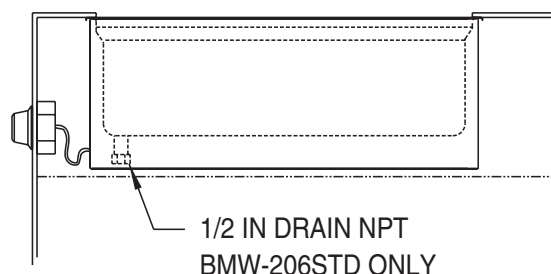

BMW-206ST ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS	PHASE	POWER SUPPLY CORD
BMW-206ST	120	1200	10.0	SINGLE	NONE
BMW-206ST	208	1240	6.0	SINGLE	NONE
BMW-206ST	240	1650	6.9	SINGLE	NONE

All models with 'D' suffix have the same electrical specifications as the standard versions.

NOTE: Specifications are subject to change without notice. See installation instructions prior to installing the unit. This document is not for installation purposes. The installation of recognized component units requires additional evaluations to Underwriters Laboratories Inc. standards. Depending on the installation, clearances can be changed upon further evaluations to UL standards.

THIS UNIT IS DESIGNED TO BE INSTALLED IN METAL COUNTERS ONLY

