

ltem#:	178GDICE24FW		Project:	
Otv:		Date:		Approval:

Avantco GD-ICE-24F 31" White Customizable Indoor Glass Door Ice Merchandiser

Item #178GDICE24FW







Technical Data

31 1/8 Inches	
33 1/4 Inches	
86 13/16 Inches	
98 1/2 Inches	
25 3/16 Inches	
25 1/4 Inches	
28 3/8 Inches	
62 Inches	
7.8 Amps	
60 Hertz	

Features

- 1 self-closing, triple-pane, argon-filled, anti-fog swing glass door
- ideal ice holding temperature range: 18 to 25 degrees Fahrenheit
- Easy-to-use digital temperature controls; interior LED lighting
- Holds approximately (45) 8 lb. bags of ice
- 115V; 1 hp; R290 refrigerant

Certifications








ETL, US 5-15P Customizable



Technical Data

Phase	1 Phase	
Voltage	115 Volts	
Wattage	792 Watts	
BTU (LBP)	2272 BTU	
Capacity	22.6 cu. ft.	
Compressor Location	Bottom Mounted	
Door Style	Swing	
Door Type	Glass	
Features	Customizable LED Lighting	
Front Style	Flat	
Horsepower	1HP	
Number of Doors	1 Doors	
Number of Shelves	1 Shelf	
Refrigerant Capacity	4.2 oz.	
Refrigerant Type	R-290	
Refrigeration Type	Auto Defrost	
Starting Amps	23.4 Amps	
Starting Wattage	2376 Watts	
Temperature Range	18 - 25 Degrees F	
Туре	Indoor	

Plan View

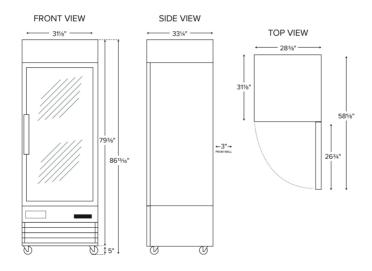



Notes & Details

Store and showcase your bagged ice offerings with this Avantco GD-ICE-24F 31" white ice merchandiser! Designed with sharp looks and usability in mind, this unit is the perfect display for your bags of ice with its sleek finish. And, since the housing is made from white coated steel and the interior floor is made from stainless steel, you can be sure that it will provide superior durability. This unit boasts a triple-pane, argon-filled, anti-fogging glass door to ensure that customers always have a clear view of your products. Plus, the raised epoxy-coated steel shelf and back panel prevent product from blocking necessary air flow, while supporting up to 396 lb. of weight. Interior LED lighting works to illuminate and further merchandise your products. It even minimizes energy consumption by producing less heat than other types of lighting.

Designed to maintain ideal ice storage temperatures from 18 to 25 degrees Fahrenheit, this freezer boasts a bottom-mounted 1 hp compressor that runs on R290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is made from foamed-in place polyurethane insulation. Other helpful features include a self-closing door, a removable magnetic gasket for easy cleaning, automatic defrosting, as well as a digital temperature control and display. This item requires a 115V electrical connection for operation.

⚠ WARNING: This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.p65warnings.ca.gov.