

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

BAR EQUIPMENT- BACK BAR REFRIGERATOR

BB72HC Glass Door With Stainless Steel Top Hydrocarbon Series

MODEL: BB72HC-1-G-S-27



7 Year Parts/Labor Warranty 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Exterior is stainless steel front and sides
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- Full electronic control
- 2" Stainless steel top
- Self-closing doors with 120° stay-open feature
- · Field reversible doors (hinge kit not included)
- Door locks
- Magnetic door gaskets provide positive door sealing
- LED lighting
- Packaged products only
- Six (6) epoxy coated wire shelves
- · Compressor available on left or right, specify at time of unit order
- Balanced, forced air refrigeration system provides rapid chilling of product

OPTIONS & ACCESSORIES

- For stainless steel interior (refer to -F models)
- Galvanized sub-top
- Wine model (40°-60° models)
- · Wire shelf divider
- Additional shelves
- Additional shelf clips
- 3" or 6" Casters
- 6" Black legs
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F










MODEL	BB72HC-1-G-S-27	
EXTERNAL DIMENSIONAL DATA		
Width Overall	72"	
Depth Overall	24 ½"	
Height Overall	36"	
Number of Doors	3	
Depth with Door Open 90°	42 %"	
Door Openings (in)	17 ¾" x 29 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	19.92	
Internal Width Useable (in)	60 ¼"	
Internal Depth Overall (in)	19"	
Internal Height Overall (in)	29 ¾"	
Number of Shelves	6	
Number of 1/2 Kegs	3	
ELECTRICAL DATA		
Full Load Amperes	3.1	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	1942	
Heat Rejection (BTU/Hr)	2913	
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.9	
SHIPPING DATA		
Gross Weight - Crated	388 lbs	
Height - Crated	40"	
Width - Crated	75"	
Depth - Crated	27"	

^{*}NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Bar Equipment-Back Bar Refrigerator Model: BB72HC-1-G-S-27

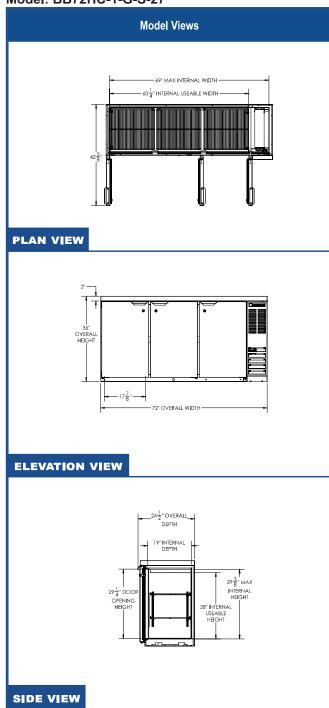





ELECTRICAL CONNECTION

115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

