

Project:	AIA#
ltem:	
Location:	SIS#
Approved:	

## BAR EQUIPMENT- BACK BAR REFRIGERATOR

MODEL:

BB72HC-1-GS-F-PT-S-27

BB72HC Sliding Glass Door Food Rated Pass-Thru With Stainless Steel Top Hydrocarbon Series

> 7 Year Parts/Labor Warranty 7 Year Compressor Warranty



### **CABINET CONSTRUCTION**

- · Exterior is stainless steel front and sides
- Stainless steel interior
- Full electronic control
- 2" Stainless steel top
- · Magnetic door gaskets provide positive door sealing
- · Self-closing sliding glass doors have black frame regardless of
- Stay-open feature and locks standard
- LED lighting
- Packaged products only
- Six (6) epoxy coated wire shelves
- · Certified for open food product
- Balanced, forced air refrigeration system provides rapid chilling of product

#### **OPTIONS & ACCESSORIES**

- Galvanized sub-top
- Wine model (40°-60° models)
- Wire shelf divider
- Additional shelves
- · Additional shelf clips
- 3" or 6" Casters
- 6" Black legs
- Remote option\* (see note on back on page)

#### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F







3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com




MODEL	BB72HC-1-GS-F-PT-S-27	
EXTERNAL DIMENSIONAL DATA		
Width Overall	72"	
Depth Overall	25 ¾"	
Height Overall	36"	
Number of Doors	6	
Door Openings (in)	18 ½" x 26 ¼"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	22.1	
Internal Width Useable (in)	60 ¼"	
Internal Depth Overall (in)	18"	
Internal Height Overall (in)	29 ¾"	
Number of Shelves	6	
Number of 1/2 Kegs	3	
ELECTRICAL DATA		
Full Load Amperes	3.1	
REFRIGERATION DATA		
Horsepower	1/3	
Capacity (BTU/Hr)	1942	
Heat Rejection (BTU/Hr)	2913	
Charge (lbs/grams/ounces)	0.3086 / 140 / 4.9	
SHIPPING DATA		
Gross Weight - Crated	432 lbs	
Height - Crated	43"	
Width - Crated	75"	
Depth - Crated	29"	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/-  $1/4^{\circ}$ . Metric dimensions (MM).

# Bar Equipment-Back Bar Refrigerator Model: BB72HC-1-GS-F-PT-S-27

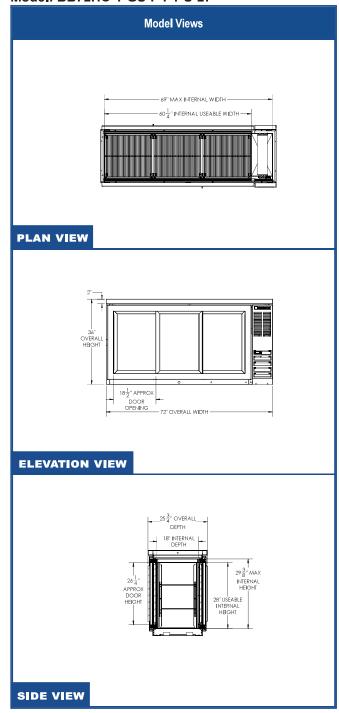





Unit pre-wired at factory and include 8' long cord and plug set.

