



# BEVERAGE-AIR®

PROJECT: \_\_\_\_\_  
 ITEM # \_\_\_\_\_ QTY: \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 AIA # \_\_\_\_\_ SIS # \_\_\_\_\_  
 APPROVED: \_\_\_\_\_

## DIPPING CABINETS

**Model: BDC-HC-8**



**3 Year Parts/Labor Warranty  
 5 Year Compressor Warranty**

### CABINET CONSTRUCTION

- Galvanized metal cabinet with powder coated painted surface
- Interior easy to clean per-painted steel
- Adjustable thermostat
- LED lighting
- Glass lids are LowE tempered sliding glass lids with locks and keys standard
- 2" Heavy-duty casters allow easy and fast movement
- Drain plug for easy cleaning
- Lexan sneeze guard
- BDC-8 includes (4) 2- ring tub holds with space for (8) 3 gallon containers, lower level provides extra container storage of six (6) 3 gallon containers
- Cold wall refrigeration system, maintains 0° to -10°F



### OPTIONS & ACCESSORIES

- 2 Ring tub holder
- Custom graphics
- Dip well

### REFRIGERATION SYSTEM

- Refrigeration system uses R290 refrigerant to comply with all environmental concerns
- The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55%
- Areas with direct sunlight should also be avoided
- Triple access air flow compressor compartment
- Maintenance free condenser




# BEVERAGE-AIR®

## Dipping Cabinets Model: BDC-HC-8

SIDE VIEW

ELEVATION VIEW

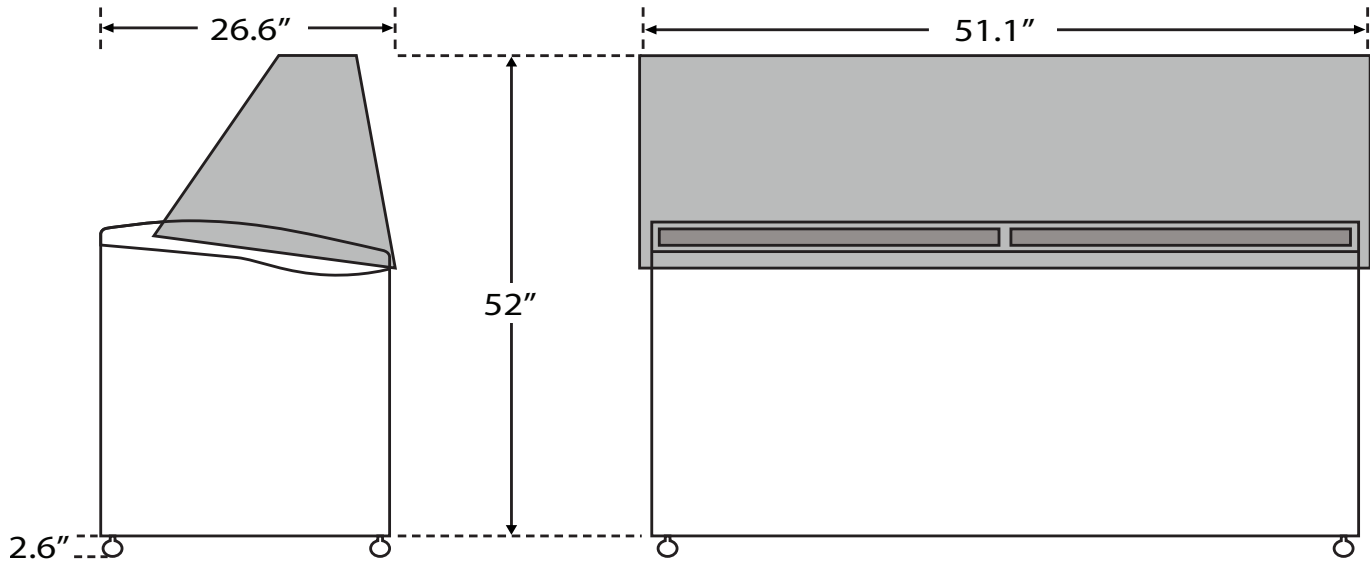

### EXTERNAL DIMENSIONAL DATA

|                     |          |
|---------------------|----------|
| Width Overall (in)  | 51 1/10" |
| Depth Overall (in)  | 26 2/5"  |
| Height Overall (in) | 52"      |
| Tub Holders         | 6        |

### INTERNAL DIMENSIONAL DATA

|                               |                   |
|-------------------------------|-------------------|
| NET Capacity (cubic ft.)      | 13                |
| Capacity- Bottom holding area | (8) 3 Gallon tubs |
| Capacity- Bottom holding area | (6) 3 Gallon tubs |

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

### ELECTRICAL DATA

|                     |          |
|---------------------|----------|
| Full Load Amps      | 3.5      |
| Voltage             | 115/60/1 |
| Nema Plug (8' cord) | 5-15P    |

### REFRIGERATION DATA

|                           |                   |
|---------------------------|-------------------|
| Horsepower                | 1/4+              |
| Capacity (BTU/Hr)         | 1130              |
| Heat Rejection (BTU/Hr)   | 1695              |
| Charge (lbs/grams/ounces) | 0.198 / 90 / 3.17 |

### SHIPPING DATA

|                       |          |
|-----------------------|----------|
| Gross Weight - Crated | 348 lbs. |
| Height - Crated (in)  | 53"      |
| Width - Crated (in)   | 44"      |
| Depth - Crated (in)   | 28"      |

### ELECTRICAL CONNECTION



115/60/1  
NEMA 5-15P

Unit pre-wired at factory  
and include 8' long cord  
and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 8/26 | Printed in U.S.A.