



# F5 Serview Drop In

## 24" Deep Mirrored Self-Contained Refrigerated Display Cases

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

F5 Serview Drop In: 24" Deep Mirrored Self-Contained Refrigerated Display Cases

### Models

- F5MC48N 24" deep self-contained drop in display section
- F5MC72N 24" deep self-contained drop in display section



F5MC72N

### Standard Features

- Display exterior sides are made of 18-gauge stainless steel
- Galvanized steel reinforced ABS plastic interior sides with molded shelf supports
- (4) adjustable epoxy coated wire shelves
- On/off switch for the display section light(s)
- Top mount coil with multiple fans circulating the air throughout the cabinet
- Display section runs off a thermostatic control
- Sliding and removable self-closing 0.50" thick argon filled, low-E, warm edge insert, thermopane glass doors with left and right vertical gasket
- High density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam throughout unit
- Single service display section with mirrored back
- Environmentally friendly HFC-404A refrigerant
- One year parts and 90 day labor standard warranty

### Options & Accessories

- 48" shelf (48" long units only)
- 72" shelf (72" long units only)
- Stainless steel back
- Laminate ends
- 220 volt/50 cycle - inclusion of this option will alter specifications

### Specifications

Display section exterior sides are made of 18-gauge stainless steel. Exterior display section top to be 22-gauge galvanized metal. Interior sides are made of galvanized steel reinforced 0.095" thick ABS plastic with molded shelf supports. The interior bottom is constructed with stainless steel for long lasting durability. Display section is fully insulated with high density environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane foam between the interior and exterior. Four adjustable epoxy coated wire shelves are provided for the display section. An on/off switch for the display section light(s) is located at the right end of the front facing, above the display section doors.

Display case refrigeration system consists of a full-length top mounted coil with multiple fans circulating the air throughout the cabinet utilizing a thermostatic control. An ABS plastic drip pan is placed below the coil with a clear drain hose for running the condensation to the lower base mechanical section.

Front of the display section is equipped with two sliding and removable self-closing 0.50" thick argon filled, low-e glass

doors with a warm edge spacer. The vertical outsides of each door tuck into an extruded channel running vertically up each side. Front nosing to be stainless steel.

Self-contained models have a pre-wired condensing unit housed in a 16-gauge cage hanging from the units exterior bottom. Cage also is supplied with an 8' cord and plug and electrical junction box. Electrical connections are 115V-60H-1PH.

Refrigeration system components are HFC-404A. Display cabinet blower coil assembly shall have a coated evaporator coil and fans. Interior refrigerated base cabinet and display section to maintain 36°F to 40°F temperatures at 100°F ambient room temperature.


Back has 2" thick panel, constructed on 22-gauge stainless steel interior, 2" of high-density polyurethane foam and 22-gauge galvanized steel exterior. Interior of back panel has (2) angled glass mirrors.





# F5 Servview Drop In

24" Deep Mirrored Self-Contained Refrigerated Display Cases

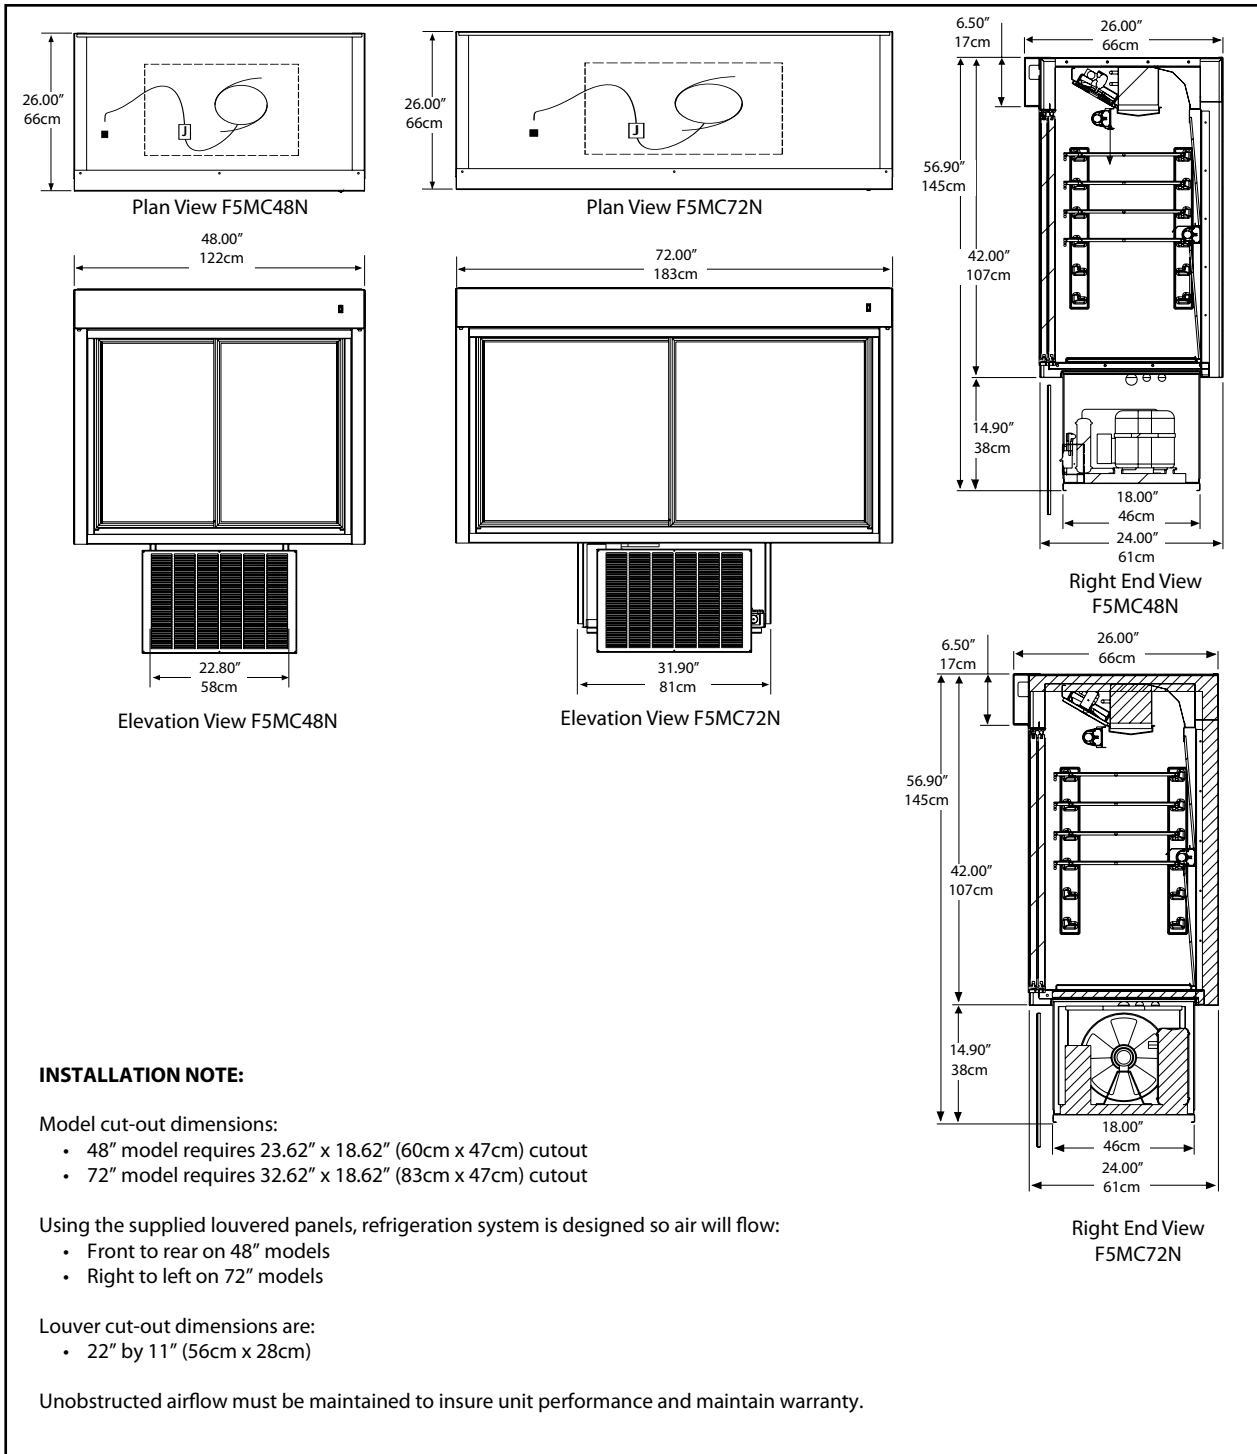

## Specifications

Model	Shelf Area	Storage Capacity	H.P.	Sys. Cap BTU/Hour	Cabinet Load BTU/Hour	V/Hz/Ph	Amps	Nema Plug	Ship Weight
F5MC48N	18.5ft <sup>2</sup>	14.3ft <sup>3</sup>	1/2	3160	1150	115/60/1	12.0	5-15P	415lbs/188kg
F5MC72N	29.2ft <sup>2</sup>	22.2ft <sup>3</sup>	3/4	5758	1700	115/60/1	16.0	5-20P	560lbs/254kg

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.  
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981  
Fax: 800-669-0619  
www.delfield.com

Printed in the U.S.A.  
DSF5MCN  
03/10

