

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

BAR EQUIPMENT - BAR MOBILE DZ24 Solid Door Dual Zone

MODEL: DZ24-1-S



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior
- Interior is galvanized steel with reinforced stainless steel floor
- Stainless steel top with black glass rails
- Stainless steel drip tray for easy cleaning
- Full electronic control
- 3-in-1 Draft solution uses a single stainless-steel tap to serve different beverages, such as wine, beer, and coffee (or other non-alcoholic beverages) through silver-lined, anti-microbial tubing that is 100% effective against the top 4 beverage spoiling bacteria
- Dual zone models feature 2 independent compartments that allow independent temperature in each section
- Unit has a minimum variance of +/-15°F, and maximum of 20°F depending on condition
- 100% portable with waste bottle to capture beer/wine from drain
- Magnetic gasket provides positive door sealing
- · Self-closing door with lock standard
- 3" Insulated tower with dual faucet, standard
- Holds up to (4) 1/6 kegs in each section
- Four-inch (4") deavy duty casters with two (2) brakes

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- · Stainless steel interior
- Tap Locks
- 1- 4 Tap insulated stainless towers/taps
- No draft arm with hole cover

REFRIGERATION SYSTEM

- Refrigeration system uses R134a refrigerant to comply with all environmental concerns
- · Automatic, non-electric defrost
- Epoxy coated evaporator coil
- Left hand compartment maintains 32°-40°F, Right hand maintains 50°-65°F












MODEL	DZ24-1-S	
EXTERNAL DIMENSIONAL DATA		
Width Overall	24"	
Depth Overall (with handle)	29 ¾"	
Height Overall (with casters)	53"	
Number of Doors	1	
Depth with Door Open 90°	50 ½"	
Door Openings (in)	20" x 27 ¾"	
INTERNAL DIMENSIONAL DATA		
NET Capacity Freezer (cubic ft.)	(L) 3.72, (R) 3.72	
Internal Width Overall (in)	10"	
Internal Depth Overall (in)	18 ½"	
Internal Max Height Overall (in)	29 ½"	
ELECTRICAL DATA		
Full Load Amperes	4.0	
REFRIGERATION DATA		
Horsepower	1/5	
Capacity (BTU/Hr)	1110	
Heat Rejection (BTU/Hr)	1665	
Charge (lbs/grams)	0.1433/65	
SHIPPING DATA		
Gross Weight - Crated	220 lbs	
Height - Crated	64"	
Width - Crated	27"	
Depth - Crated	31"	

Bar Equipment - Dual Zone Bar mobile Model: DZ24-1-S

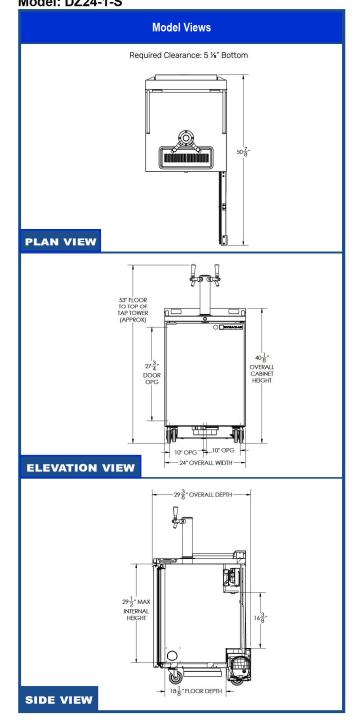



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord NEMA 5-15P and plug set.