

FE SERIES - FABRICATED SINKS



Aprox.

Three & Four Compartments

Length Width Bowl Size Bowl Drbd. Length # of



Rolled Rim Edge For

	Qty #:
<i>Model</i> #:	
Project #:	

Drbrd.

Additional Strength



K-700Removable Side
Splashes Fits Left
OR Right Side

	MODEL #	L	W	A & B	Depth	C	Drbrds.	Location	Wt	Cubes
	FE-3-1515-X	50"	20 3/4"		12"	N/A	0	None	95 lbs.	25
	FE-3-1515-15RorLX	62 1/2"	20 3/4"	15"x15"	12"	15"	1	R or L	105 lbs.	31
	FE-3-1515-15RLX	75"	20 3/4"		12"	15"	2	R&L	115 lbs.	31
	FE-3-1620-X	53"	25 3/4"	16"x20"	12"	N/A	0	None	88 lbs.	25
	FE-3-1620-18RorLX	68 1/2"	25 3/4"		12"	18"	1	R or L	96 lbs.	38
	FE-3-1620-18RLX	84"	25 3/4"		12"	18"	2	R&L	105 lbs.	42
σ:	FE-3-1812-X	59"	23 3/4"	18"x18"	12"	N/A	0	None	90 lbs.	22
COME	FE-3-1812-18RorL-X	74 1/2"	23 3/4"		12"	18"	1	R or L	102 lbs.	29
	FE-3-1812-18RLX	90"	23 3/4"		12"	18"	2	R&L	110 lbs.	42
ဗ	FE-3-1812-24RLX	102"	23 3/4"		12"	24"	2	R&L	149 lbs.	46
	FE-3-1824-18RLX	90"	29 3/4"		14"	18"	2	R&L	240 lbs.	47
	FE-3-1824-24RorLX	80 1/2"	29 3/4"	18"x24"	14"	24"	1	R or L	242 lbs.	50
	FE-3-1824-24RLX	102"	29 3/4"		14"	24"	2	R&L	250 lbs.	54
	FE-3-2424-X*	79"	29 3/4"	24"x24"	14"	N/A	0	None	300 lbs.	47
	FE-3-2424-24RorL-X*	98 1/2"	29 3/4"		14"	24"	1	R or L	328 lbs.	67
	FE-3-2424-24RLX*	120"	29 3/4"		14"	24"	2	R&L	340 lbs.	67
COMP.	FE-4-1812-18RL-X*	108"	23 3/4"	18"x18"	12"	18"	2	R&L	250 lbs.	67
ŠË	FE-3-1014-X	35"	19 3/4"	10"x14"	10"	N/A	0	None	85 lbs.	18
SA	FE-3-1014-15RLX	60"	19 3/4"		10"	15"	2	R&L	98 lbs.	22
	FE-3-1416-12RLX	66"	21 3/4"	14"x16"	12"	12"	2	R&L	92 lbs.	42

* Requires Two Faucets

FEATURES:

Backsplash has tile edge for ease of installation.

Sink bowls are 3/4" coved corner and meet NSF requirements. Rolled Rim Edge for additional strength.

rioned rinn Edge for additional on

10"x14 Sink Bowls are 10" deep.

14"x16", 15"x15", 16"x20" & 18"x18" Sink Bowls are 12" deep. 18"x24" & 24"x24" Sink Bowls are 14" deep.

9" Backsplash.

CONSTRUCTION:

All TIG welded.

Welded areas blended to match adjacent surfaces and to a satin finish.

Gussets welded to a die-embossed reinforced plate.

MATERIAL:

1 5/8" diameter galvanized legs with

1" adjustable plastic bullet feet.

Entire unit is 18 gauge 304 stainless steel.

Gussets - galvanized steel.

MECHANICAL:

- Supply is 1/2" IPS hot & cold.
- Faucet holes on 8" centers.
- Faucets are not included (see accessories).
- Waste drains are 1 1/2" IPS S/S basket type, located in center of sink bowl, and are included.

OPTIONAL:

- FE-SS-12 S/S Leg Upgrade For Sinks w/ 12" Deep Bowls
- FE-SS-14 S/S Leg Upgrade For Sinks w/ 14" Deep Bowls



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK Fax: (631) 242-6900 **GEORGIA** Fax: (770) 775-5625


TEXAS Fax: (972) 932-4795 NEVADA


Fax: (775) 972-1578

DIMENSIONS and SPECIFICATIONS

TOL Overall: ± .500" Interior: ± .250"

ALL DIMENSIONS ARE TYPICAL

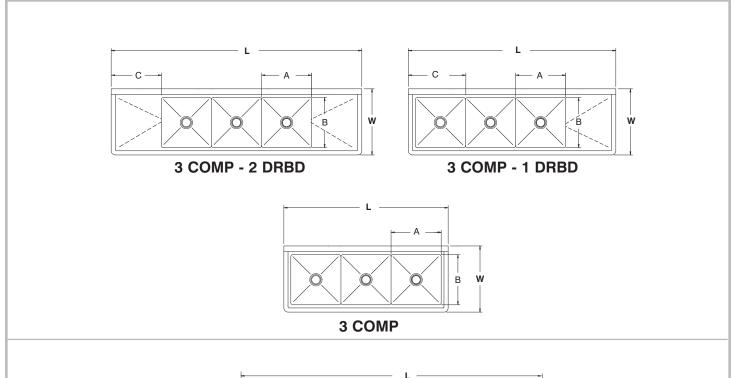



4 COMP - 2 DRBD

ACCESSORIES	Model #	Qty
DRAINS		
FAUCETS		



