

model SP11FC

Eyewash Head

FEATURES & BENEFITS

OPTIONS

For more information, visit www.hawsco.com or call (888) 640-4297.




SPECIFICATIONS

Model SP11FC is a Soft-Flo ABS plastic anti-surge eyewash head in Safety Green, with a built-in 1.2 gpm (4.5 L) automatic pressure compensation flow control. This assures a single, soft-and-steady stream of water for flowing water pressure ranging from 30 to 90 psi (2.1 to 6.2 bar). Flow control is easily accessible for cleaning. Supply: 1/4" NPT.

APPLICATIONS

1. MODEL SPITFC IS DESIGNED FOR 1.2 GPM FLOW.

- 2. ASSEMBLY INSTRUCTIONS:
- SIEP 1. REMOVE OLD EYEWASH HEAD.
- STEP 2. MAKE SURE THREADS ARE CLEAN.
- SCREW ON NEW EYEWASH HEAD UNTIL HAND TIGHT.
- DO NOT USE PIPE SEALANT AS THIS COULD DAMAGE EYEWASH HEAD.
- TEFLON TAPE CAN BE USED BUT NOT REQUIRED.
- SIEP 4. TURN ON VALVE & CHECK FLOW PATTERN USING EYEWASH

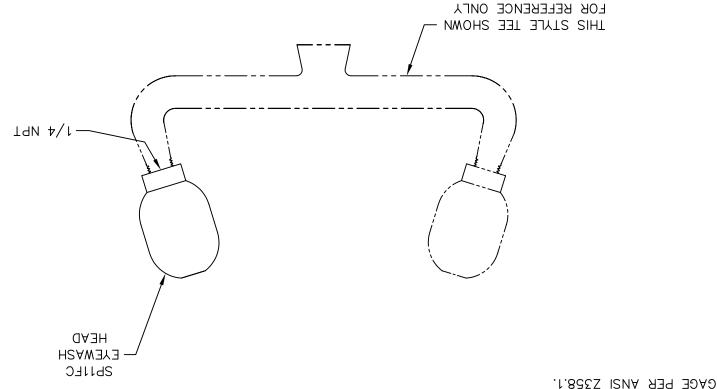

INFO FAX: 1-888-FX-HAWS (1-888-329-4297)

website: www.hawsco.com e-mail: Haws@hawsco.com Haws Mig Pte Ltd 74 Sungei Kadut Loop Singapore 729531 Phone: 775-359-4712 Fax: 775-359-7424

14845A00 0 14845A00 0 1 INFO FAX DOC #: 2771132 0002080391 TITLE: EYEWASH HEAD, SPITFC PART NUMBER:

MODEL: SPITEC