



model SP158B

Freeze Protection Bleed Valve

FEATURES & BENEFITS

FREEZE PROTECTION

Protects an emergency shower and/or eyewash from water temperatures that can drop below 35° F (1.7° C) by bleeding off the excessively cold fluid during 'snap freezes'.

OPTIONS

For more information, visit www.hawsc.com or call (888) 640-4297.



SPECIFICATIONS


Model SP158B, fully engineered freeze protection valve is constructed of a one piece brass body, and supplied with a removable cartridge for easy cleaning and maintenance. Automatic thermal actuator bleed valve opens when internal water temperature falls below 35° F (1.7° C) and closes completely when the water climbs back to 42° F (5.6° C). 1/2" NPTF inlet and outlet.

APPLICATIONS

Specifically, SP158B is suitable for emergency applications, or other plumbing situations where freezing water temperature protection is needed or required. Can be used in conjunction with most Haws shower and/or eyewash units.

NOTES:

- 1 THERMOSTAT CARTRIDGE REPLACEMENT INFO: CONTACT HAWS TECHNICAL SUPPORT AT TELEPHONE NUMBER LISTED BELOW. REPLACEMENT PART IS - MODEL VRK158B (KIT, REPAIR, SP158B).

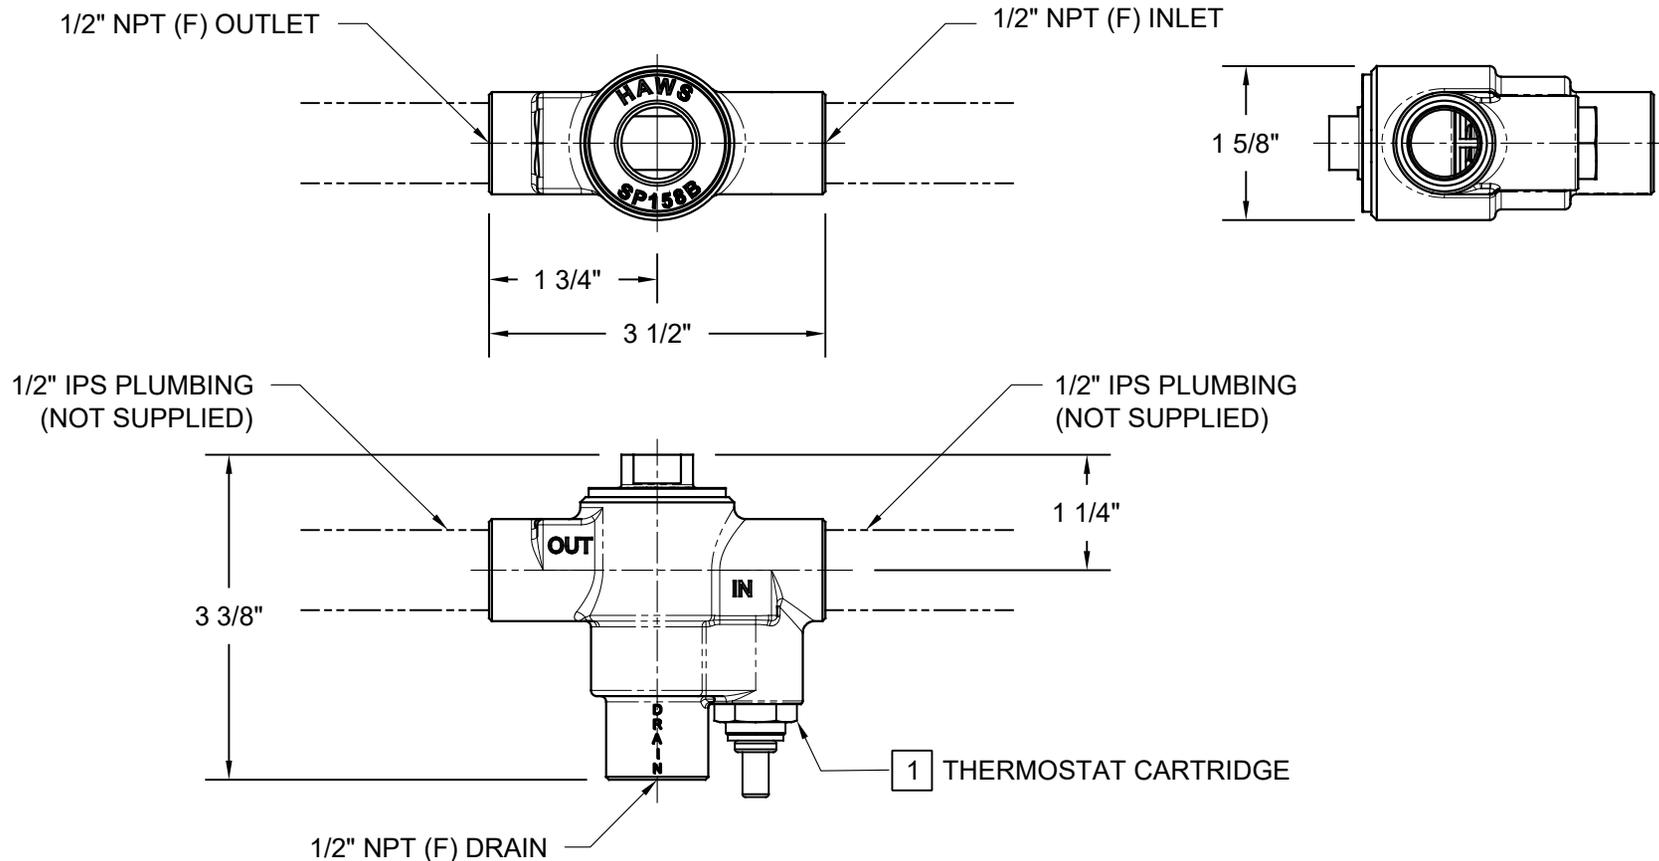



IN-LINE DRAIN INSTALLATION SHOWN
(INLET AND OUTLET CONNECTED)

FOR SPECIFIC INSTRUCTION REGARDING INSTALLATION,
RETRO-FIT, MAINTENANCE OF THIS MODEL CONTACT
HAWS TECHNICAL SUPPORT AT 1-800-766-5612.

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO. 4703 ECN: 5481 REVISED PER: DP	MODEL(S) SP158B
DRAWN: VWC DATE: 10/25/12 CHK'D: FV	APPROVED: NE DATE: 10/07/19	SCALE: 1/1 DRAWING TYPE: INSTALLATION	REVISION 7
©2019 Haws Corporation - All Rights Reserved. HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.		SHEET 1 OF 2	


1/2" NPT (F) OUTLET

1/2" NPT (F) INLET

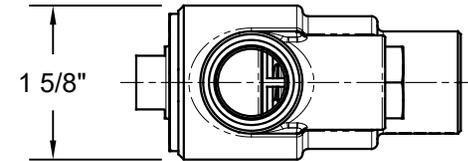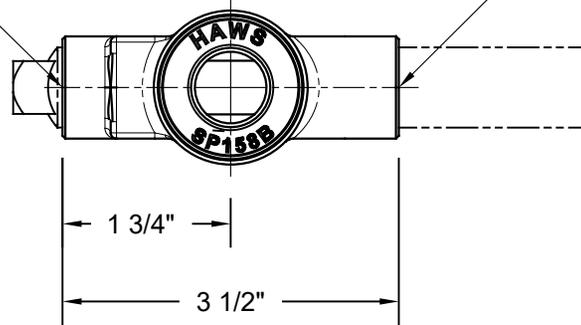

1/2" IPS PLUMBING
(NOT SUPPLIED)

1/2" NPT (M) SQUARE PLUG
(NOT SUPPLIED)

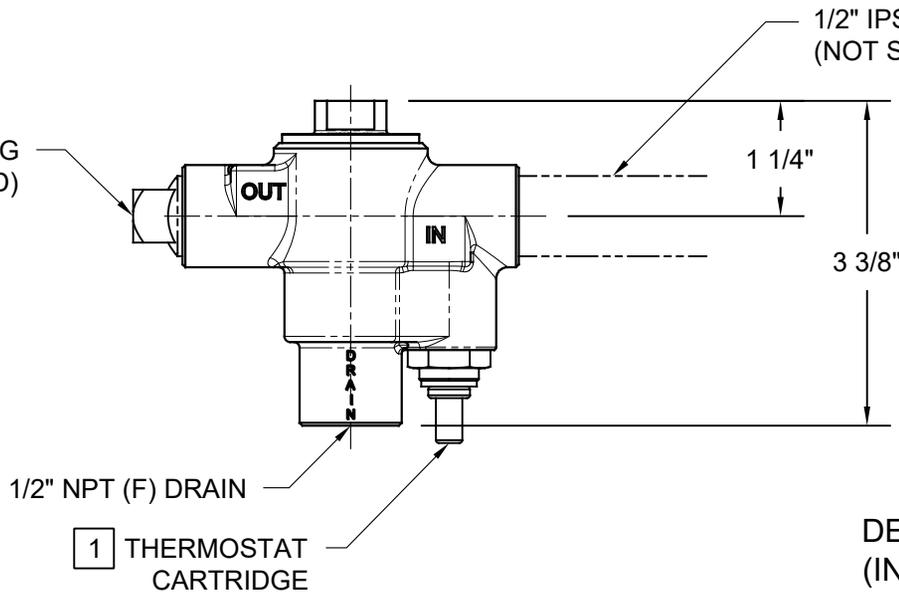

DEAD-LEG DRAIN INSTALLATION SHOWN
(INLET CONNECTED / OUTLET PLUGGED)

FOR SPECIFIC INSTRUCTION REGARDING INSTALLATION,
RETRO-FIT, AND MAINTENANCE OF THIS MODEL CONTACT
HAWS TECHNICAL SUPPORT AT 1-800-766-5612.

		1455 KLEPPE LANE SPARKS, NEVADA 89431 (775) 359-4712 FAX (775) 359-7424 E-MAIL: HAWS@HAWS.CO.COM WEBSITE: WWW.HAWS.CO.COM	
		ECN NO. 4703 DRAWN: VWC APPROVED: NE	REVISED PER: ECN: 5481 DATE: 10/25/12 DATE: 10/07/19
SCALE: 1/1		DRAWING TYPE: INSTALLATION	
SIZE: A		SHEET 2 OF 2	