



BEVERAGE-AIR®

PROJECT: _____
ITEM # _____ QTY: _____
MODEL # _____
AIA # _____ SIS # _____
APPROVED: _____

MARKETMAX REFRIGERATORS

MARKETMAX REFRIGERATORS

Model: MMR12HC-1-B-IQ

GLASS DOOR MERCHANDISER / ELECTRONIC LOCKS



7 YEAR WARRANTY Parts, Labor, and Compressor

CABINET CONSTRUCTION

- Exterior features durable black painted steel
- Heavy-duty interior construction includes white coated steel walls
- Modern one-piece grille
- Full electronic control
- Electronic Smart Lock - detects power loss or temperature failure, and automatically locks the unit
- Refrigerators have double pane lowE argon filled glass door
- Self-closing door with 120° stay-open feature
- Snap-in gaskets, easy to remove for cleaning or replacement
- LED lighting
- Four (4) heavy-duty epoxy coated wire shelves
- Four (4) shelf clips included per shelf
- Bottles and cans only
- Self-contained bottom mount refrigeration system
- Leveling feet standard



OPTIONS & ACCESSORIES

- Stainless steel or black exterior
- Stainless steel or black interior
- Shelves black or white
- Shelf clips
- Flow track
- Gravity track
- Price tag molding
- 3" or 6" Casters
- 6" Legs or seismic/flanged legs
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM


- Uses environmentally friendly, energy efficient R290, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Non-electric defrost with hot gas condensate evaporation
- Epoxy coated evaporator coil
- Maintains product temperatures between 36° - 38°F




BEVERAGE-AIR®

MarketMax Refrigerators Model: MMR12HC-1-B-IQ


PLAN VIEW

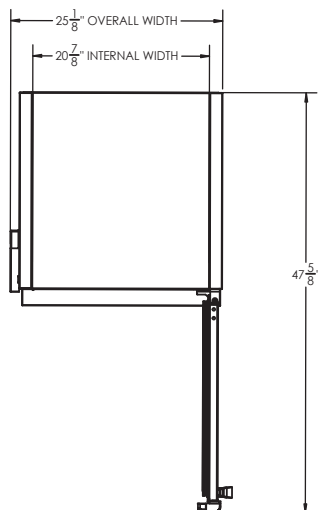

ELEVATION VIEW

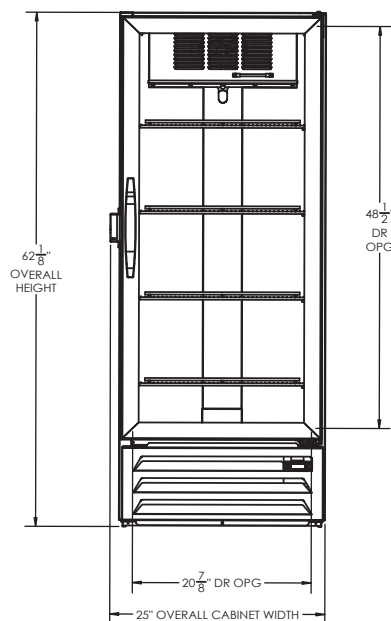

SIDE VIEW

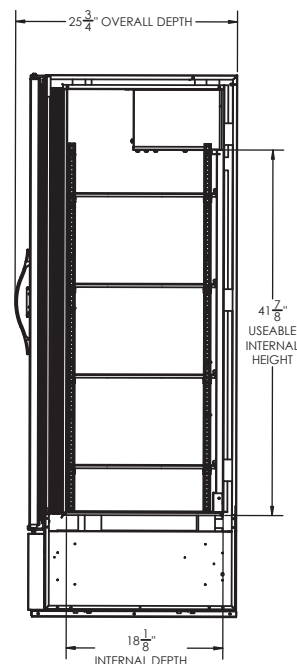

EXTERNAL DIMENSIONAL DATA

Width Overall (in)	25 1/8"
Depth Overall (in)	25 3/4"
Height Overall (in)	62"
Number of Doors	1
Depth with Door Open 90 °	47 5/8"
Door Openings (in)	20 7/8" x 48 1/2"

INTERNAL DIMENSIONAL DATA

NET Capacity (cubic ft.)	12.06
Internal Width Overall (in)	20 7/8"
Internal Depth Overall (in)	18 1/8"
Internal Height Overall (in)	41 7/8"
Number of Shelves	4

*NOTE: Remote units are field wired and come with 6" legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: Rear 3"

ELECTRICAL DATA

Full Load Amps	1.7
Voltage	115/60/1
Nema Plug (8' cord)	5-15P

REFRIGERATION DATA

Horsepower	1/6
Capacity (BTU/Hr)	1010
Heat Rejection (BTU/Hr)	1515
Charge (lbs/grams/ounces)	0.1653 / 75 / 2.6

SHIPPING DATA

Gross Weight - Crated	291 lbs.
Height - Crated (in)	68"
Width - Crated (in)	26"
Depth - Crated (in)	27"

ELECTRICAL CONNECTION



115/60/1
NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 8/26 | Printed in U.S.A.