

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

NC NOVELTY CASES

NC43HC Novelty Freezers Hydrocarbon Series

MODEL: NC43HC-1-W

7 Year Parts/Labor Warranty 7 Year Compressor Warranty



CABINET CONSTRUCTION

- Exterior is white coated steel
- Interior is white powder coated surface
- Low energy consumption
- LED lighting
- Adjustable thermostat
- Operating temperature of 0°F to -10°F
- · Angle top design with LowE tempered glass lids
- Lids are easily removable with lid lock & keys standard
- Round exterior edges
- · Integrated tag molding
- 2" Heavy duty casters
- Drain plug for easy cleaning
- Four (4) removable baskets

OPTIONS & ACCESSORIES

- 2 Ring tub holder
- Custom graphics
- Dip well

REFRIGERATION SYSTEM

- Reingeration system uses R290 reingerant to comply environmental concerns
- The unit is best suited for an environment where temperatures remain below 75°F and humidity does not exceed 55'%
- Areas with direct sunlight should also be avoided
















MODEL	NC43HC-1-W	
EXTERNAL DIMENSIONAL DATA		
Width Overall	42 ½"	
Depth Overall	26"	
Height Overall (with casters)	34 1/5"	
Number of Lids	2	
Number of Baskets	4	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	7.63	
Internal Width Overall (in)	36 1/5"	
Internal Depth Overall (in)	19 7⁄10"	
Internal Front Height Overall (in)	24"	
Internal Rear Height Overall (in)	26 1/5"	
ELECTRICAL DATA		
Full Load Amperes	3.5	
Voltage	115/60/1	
Nema Plug (8' cord)	5-15P	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1130	
Heat Rejection (BTU/Hr)	1695	
Charge (lbs/grams)	0.198/90	
SHIPPING DATA		
Gross Weight - Crated	180 lbs	
Height - Crated	40"	
Width - Crated	46"	
Depth - Crated	28"	

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4°. Metric dimensions (MM).

Novelty Case Freezer Model: NC43HC-1-W

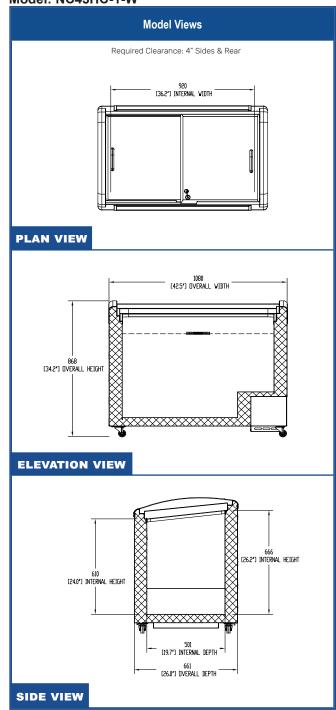















115/60/1

Units pre-wired at fac-NEMA 5-15P tory and include 8' long cord and plug set.

