

| Project:  | AIA# |
|-----------|------|
| Item:     |      |
| Location: | SIS# |
| Approved: |      |

# **SLATE REACH-IN FREEZER**

SF2HC Solid Door Bottom Mount Hydrocarbon Series

MODEL: SF2HC-1S



2 Year Parts/Labor Warranty7 Year Compressor Warranty

## **CABINET CONSTRUCTION**

- Stainless steel door and grille with modern slate finish sides
- Interior features easy to clean white coated steel walls with slate finish interior door
- Electronic temperature control
- LED lighting standard
- Six (6) adjustable epoxy shelves
- Door locks standard
- 6" Casters standard

## **OPTIONS & ACCESSORIES**

Additional shelves

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Freezer capable of maintaining product temperature down to 0°F
- Automatic defrost cycle








| MODEL                        | SF2HC-1S                           |  |  |
|------------------------------|------------------------------------|--|--|
| EXTERNAL DIMENSIONAL DATA    |                                    |  |  |
| Width Overall                | 51 ³1⁄₃₂"                          |  |  |
| Depth Overall                | 34 <sup>31</sup> / <sub>32</sub> " |  |  |
| Height Overall               | 85 <sup>41</sup> / <sub>64</sub> " |  |  |
| Number of Doors              | 2                                  |  |  |
| Depth with Door Open 90°     | 57 1⁄8"                            |  |  |
| Door Openings (in)           | 26 ¹⅓₂² x 53 ½"                    |  |  |
| INTERNAL DIMENSIONAL DATA    |                                    |  |  |
| NET Capacity (cubic ft.)     | 43                                 |  |  |
| Internal Width Overall (in)  | 48 <sup>27</sup> / <sub>64</sub> " |  |  |
| Internal Depth Overall (in)  | 26 %4"                             |  |  |
| Internal Height Overall (in) | 61 <sup>21</sup> / <sub>32</sub> " |  |  |
| Number of Shelves            | 6                                  |  |  |
| ELECTRICAL DATA              |                                    |  |  |
| Full Load Amperes            | 6.0                                |  |  |
| REFRIGERATION DATA           | FRIGERATION DATA                   |  |  |
| Horsepower                   | 1/2                                |  |  |
| Capacity (BTU/Hr)            | 2000                               |  |  |
| Heat Rejection (BTU/Hr)      | 3000                               |  |  |
| Charge (lbs/grams)           | 0.33/150                           |  |  |
| SHIPPING DATA                |                                    |  |  |
| Gross Weight - Crated        | 466 lbs                            |  |  |
| Height - Crated              | 84"                                |  |  |
| Width - Crated               | 54"                                |  |  |
| Depth - Crated               | 36"                                |  |  |

# **Bottom Mount Reach-In Solid Door Freezer**

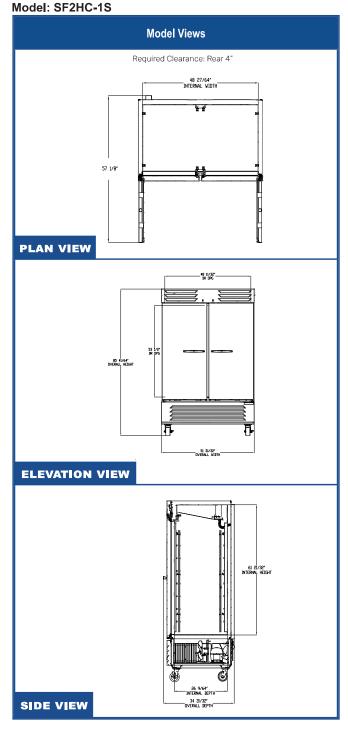



#### **ELECTRICAL CONNECTION**



120/60/1

Units pre-wired at factory NEMA 5-15P and include 7' long cord and plug set.

