

P-ROLL 320/1 PLUS P-ROLL 420/2 PLUS P-ROLL 420/2 RP PLUS

Dough Rollers



P-ROLL 420/2 PLUS
with optional pedal control



P-ROLL 420 RP PLUS

The sheeters have a parallel dough roller that requires a simple and quick pass. Ideal for rectangular products 12 1/2" top and 16 1/2" bottom rolling diameter
minimum rollers gap: 1/32" (0.8mm)
maximum rollers gap: 9/32" (7mm)

- Designed for pizza, bread, focaccia, calzones, roti, pita bread, flour tortillas, cookies, pie crusts, sweet doughs, rolled-in dough, cinnamon rolls, danish, pierogis etc. with an absorption rate of 50-60%
- Output of 250 pieces per hour
- Ergonomic, front infeed and discharge design, compact footprint, heavy gauge AISI 304 stainless steel construction
- Durable gear drive transmission
- Convenient side mounted knurled metal rotary control knobs
- The robust stainless steel, see-through hand guards provide optimal visibility for a safe and comfortable operation
- Hand guards are interlocked for automatic shut-off and remove easily
- Non-stick rollers resist rust, scratches and dents
- The laminated slide removes easily for a quick yet thorough cleaning
- Scrapers readily removable for easy cleaning
- IP67 water/dust proof switch, no-volt release. Thermal overload protection and reset button

Optional:
Foot-pedal

Motor: 0.33 Hp (240W)
Electrical: 120V AC, 60Hz, 4.5Amp
Plug and Cord: NEMA 5-15 P, SJT AWG 18



Certified to UL 763 and NSF 08
Certified to CSA Standard C22.2



Metal gears transmission



IP 67 stainless steel controls



Adjustable thickness by plastic knobs



Optional foot-pedal





P-ROLL 320/1 PLUS

Single pass, table-top design

12¹/₂" rolling diameter

minimum rollers gap: 1/32" (0.8mm)

maximum rollers gap: 9/32" (7mm)

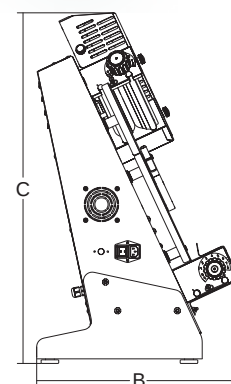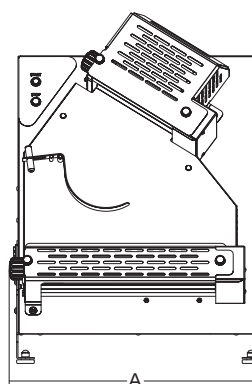

	Power	Power source	Roller dimensions	A	B	C	Net weight	Shipping	Gross weight
	watt/Hp		inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
P-Roll 320/1 Plus	240/0,33	110V, 60Hz	12 ¹⁹ / ₃₂ "	16 ¹ / ₄ "	12 ¹ / ₂ "	18 ¹ / ₂ "	64	30" x 23" x 25"	90
P-Roll 420/2 Plus	240/0,33	110V, 60Hz	8 ²¹ / ₃₂ "/16 ¹⁷ / ₃₂ "	20 ¹ / ₄ "	12 ¹ / ₂ "	31 ¹ / ₂ "	105	30" x 23" x 41"	130
P-Roll 420 RP Plus	240/0,33	110V, 60Hz	12 ¹⁹ / ₃₂ "/16 ¹⁷ / ₃₂ "	20 ¹ / ₄ "	12 ¹ / ₂ "	22 ¹ / ₂ "	108	30" x 23" x 41"	130