STAINLESS STEEL BAND SEALER WITH PRINTING

MODEL HL-M810

sealersales

Seal and Print at the Same Time

- Easy to operate with fast warm up
- Durable stainless steel construction
- Built-in coder to print date, lot codes, etc.

- Feeds right to left (Option: left to right feed)
- Vertical configuration available to seal liquids
- Recommended for materials such as polyethylene, polypropylene, laminated foil

Our **HL-M810 Stainless Steel Band Sealer** is built for high-speed, reliable sealing across all types of thermoplastic bags. Ideal for industries like food, medical, and cosmetics, this powerhouse can seals 20–30 bags per minute (6" per bag). Constructed with durable stainless steel, the HL-M810 is built for long-lasting performance and ease of use. In addition, dry ink coding comes standard on this band sealer allowing you to easily print a lot code or expiration date directly on the seal line ensuring compliance and traceability.

Easy to use with minimal training, the HL-M810 features a fast warm-up time and a solid-state digital temperature controller for consistent seal quality. The adjustable conveyor and motorized rubber belt ensure smooth operation, while knurled pressure rolls provide variable pressure control. An optional vertical configuration unit is available to seal stand up pouches or bags with liquids.

Spare parts kit include PC Board, PTFE belt, drive belts, and typesets, with additional typesets and parts available for purchase.
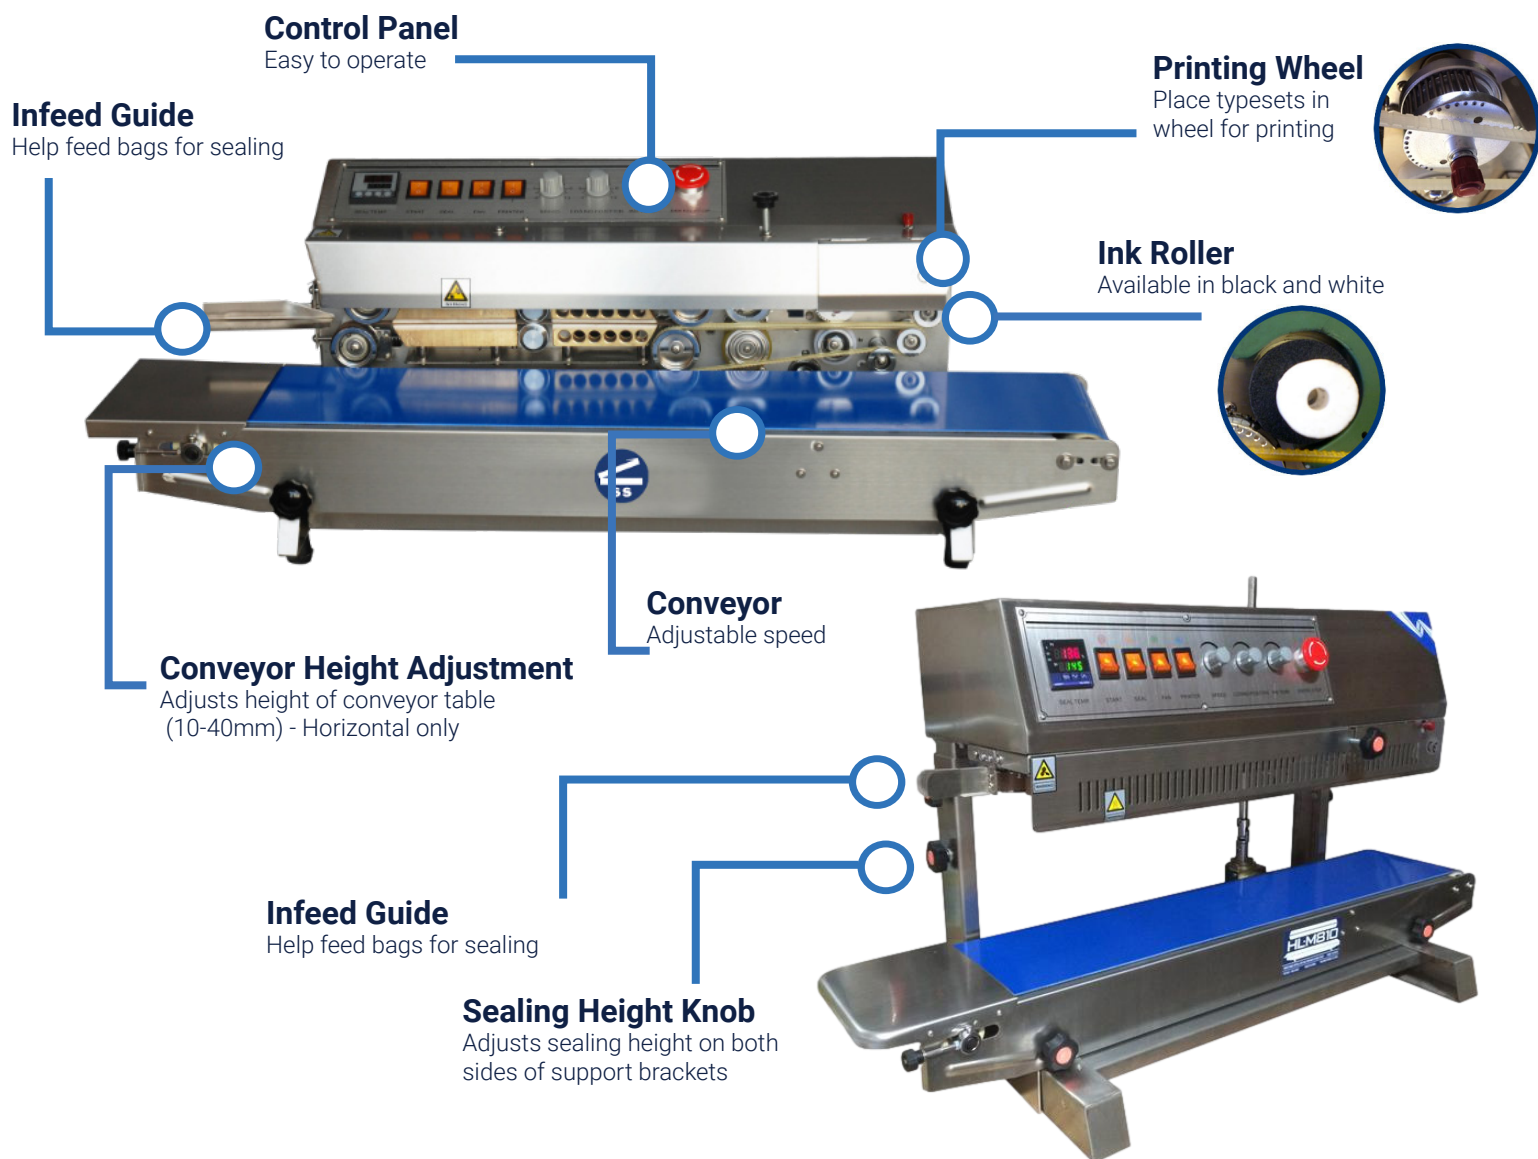
SPECIFICATIONS

POWER	110V / 60HZ	BAG HEIGHT (VERTICAL)	7-7/8" - 12"
MOTOR / SEALING POWER	50W / 300W * 2	TYPESET SIZE	18PT - 3 X 5 X 7MM
PRINTING POWER	40W * 2	TYPESETS/LINE	20 - 2 LINES
SEALING SPEED	0-630 INCHES/MINUTE	OPTIONAL TYPESET	10.5PT - 2 X 3 X 7MM
SEAL WIDTH	1/2" (10MM)	OPTIONAL TYPESETS/LINE	20 - 3 LINES
CONVEYOR SIZE	38" X 6"	DIMENSIONS (H)	38" X 16" X 14"
CONVEYOR LOAD	< 22-LBS	DIMENSIONS (V)	38" X 16" X 26"

STAINLESS STEEL BAND SEALER WITH PRINTING

MODEL HL-M810

sealersales

Control Panel
Easy to operate

Printing Wheel
Place typesets in wheel for printing

Infeed Guide
Help feed bags for sealing

Ink Roller
Available in black and white

Conveyor
Adjustable speed

Conveyor Height Adjustment
Adjusts height of conveyor table (10-40mm) - Horizontal only

Infeed Guide
Help feed bags for sealing

Sealing Height Knob
Adjusts sealing height on both sides of support brackets

Dry Ink Coding Print at Seal Line

Option: Left to Right Feed
Model No. HL-M810I_RtoL

ADDITIONAL OPTIONS
• Counter
• Smaller Typeset 10.5PT
• Right to Left Feed
• Wider Conveyor (12")
• Stainless Steel Stand
• Seal Widths: 15mm
• 220V Voltage