



## Waterloo 1.8 GPM Deck-Mount Faucet with 10" Gooseneck Spout, 4" Centers, and Lever Handles

#750CFD410G

Item #: 750CFD410G Qty: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Approval: \_\_\_\_\_ Date: \_\_\_\_\_



### Features

- 10" long gooseneck spout with 1.8 GPM aerator
- Deck-mounted design with 4" adjustable centers and 1/2" NPT inlets
- Temperature rating of 40-180 degrees Fahrenheit
- Heavy-duty chrome-plated brass construction
- Leak-resistant quarter-turn ceramic cartridges with check valves

### Certifications


 CSA, US and Canada
  NSF Listed
  1/2" Water Connection

### Technical Data

|                |               |
|----------------|---------------|
| Spout Length   | 10 Inches     |
| Faucet Height  | 15 5/8 Inches |
| Cartridge Type | Ceramic       |
| Faucet Centers | 4 Inches      |
| Features       | NSF Listed    |
| Finish         | Chrome        |
| Flow Rate      | 1.8 GPM       |
| Handle Type    | Lever         |
| Material       | Brass         |
| Mounting Style | Deck Mounted  |

| Technical Data        |                    |
|-----------------------|--------------------|
| Mounting Type         | Adjustable         |
| Rough In              | 4 Inches           |
| Spout Clearance       | 10 Inches          |
| Spout Connection Size | 1"-20 UNEF         |
| Spout Type            | Gooseneck          |
| Sprayer               | Without Sprayer    |
| Temperature Rating    | 40 - 180 Degrees F |
| Type                  | Faucets            |
| Water Inlet Size      | 1/2 Inches         |

## Plan View

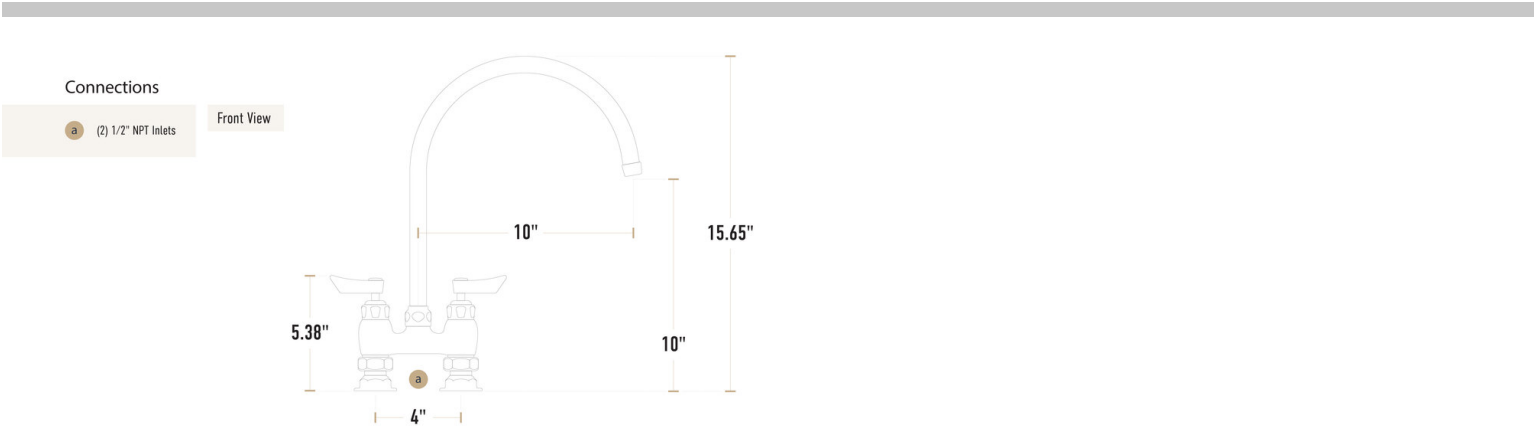

## Notes & Details

This Waterloo deck-mounted faucet is the perfect solution when you need a dependable water fixture in your facility! Waterloo faucets provide the industry-leading quality you expect. With heavy-duty chrome-plated brass faucet bodies, ceramic cartridges engineered for durability, and certifications from a wide range of national and local regulatory agencies, you can install this model with confidence.

This faucet features a 10" long swivel gooseneck spout that provides a sleek look with plenty of clearance, while a 1.8 GPM aerator provides a consistent flow rate and minimal splashing. It boasts a set of 4" adjustable centers, while the deck-mounted design is easy to install with 1/2" NPT inlets.

This faucet uses quarter-turn ceramic cartridges, which provide a much lower fail rate than the compression cartridges widely used in the industry. In this design, 2 ceramic discs fit together to create a watertight seal when closed. This removes the need for a rubber seat washer, which is one of the most frequently replaced parts on a faucet. The sturdy lever handle design makes it easy to turn the water flow off and on.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).