BEVERAGE-AIR

PROJECT: _____

ITEM # _____ QTY: _____

MODEL # _____

AIA # _____ SIS # _____

APPROVED: _____



# WORKTOP REFRIGERATORS

## Model: WTR36AHC

### TWO DOORS




## 7 YEAR WARRANTY

### Parts, Labor, and Compressor

## CABINET CONSTRUCTION

- Stainless steel front, sides, doors and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel worktop for added durability
- 4" Removable backsplash for flexibility and ease of cleaning
- Electronic control
- Interior thermometer is standard
- Self-closing door with 120˚ stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- Field-reversible door (hinge kit not included)
- Four (4) epoxy-coated steel wire shelves
- 6" Casters, two (2) with brakes standard

## OPTIONS & ACCESSORIES

- Stainless steel back
- Stainless steel interior
- Additional shelves
- Shelf clips
- Glass door option
- Right or left hinged door
- Locks
- Wire shelf divider
- 3" Casters
- 6" legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

## REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F

3779 Champion Blvd., Winston-Salem, NC 27105
888-845-9800 Fax: 336-245-6453
Beverage-Air.com Sales@bevair.com

Please verify qualifying units by visiting:
www.energystar.gov/cfs


Specifications are subject to change without prior notice.

Date Issued 10/26 Printed in U.S.A.


# BEVERAGE-AIR

## Worktop Refrigerators
## Model: WTR36AHC


PLAN VIEW

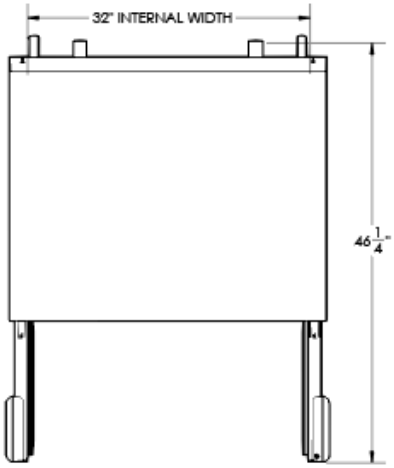


ELEVATION VIEW

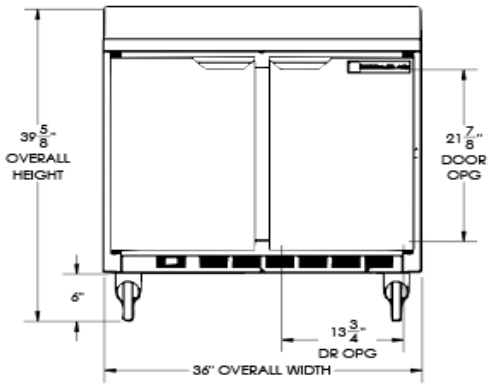


SIDE VIEW

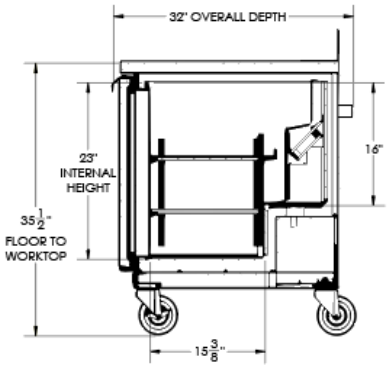


| EXTERNAL DIMENSIONAL DATA | |
|---|---|
| Width Overall (in) | 36” |
| Depth Overall (in) | 32” |
| Height Overall (in) | 39 5/8” |
| Number of Doors | 2 |
| Depth with Door Open 90 ° | 46 1/4” |
| Door Openings (in) | 13 3/4” x 21 7/8” |
| **INTERNAL DIMENSIONAL DATA** | |
| NET Capacity (cubic ft). | 8.5 |
| Internal Width Overall (in) | 32” |
| Internal Depth Overall (in) | 15 3/8” |
| Internal Height Overall (in) | 23” |
| Number of Shelves | 4 |

*NOTE: Remote units are field wired and come with 6” legs.
Refrigerant must be specified at time of order.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM).

Required Clearance: 3” Bottom & 2” Rear

| ELECTRICAL DATA | |
|---|---|
| Full Load Amps | 2.0 |
| Voltage | 115/60/1 |
| Nema Plug (8’ cord) | 5-15P |
| **REFRIGERATION DATA** | |
| Horsepower | 1/6 |
| Capacity (BTU/Hr) | 994 |
| Heat Rejection (BTU/Hr) | 1491 |
| Charge (lbs/grams/ounces) | 0.2425 / 110 / 3.9 |
| **SHIPPING DATA** | |
| Gross Weight - Crated | 216 lbs. |
| Height - Crated (in) | 38” |
| Width - Crated (in) | 39” |
| Depth - Crated (in) | 33” |

### ELECTRICAL CONNECTION



115/601
NEMA 5-15P

Unit pre-wired at factory and include 8’ long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 | 888-845-9800 | Fax: 336-245-6453 | Beverage-Air.com | Sales@bevair.com

Date Issued 10/26 | Printed in U.S.A.

WELBILT
an AJI Group Company