

Laboratory Faucet - Double

TAG	


Architectural/Engineering Specification:

Polished chrome-plated cast brass single control faucet with a rigid or swing spout, a ceramic disc cartridge and a temperature limit stop. Unit is furnished with a standard 2.2 GPM aerator, a metal ADA compliant lever handle. stainless steel flex connection hoses and mounting hardware.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

Product Features:

- · Heavy-duty Quarter Turn Ceramic Disc Cartridge
- · Chrome-plated Cast Brass Body
- Stainless Steel Flex Connection Hoses

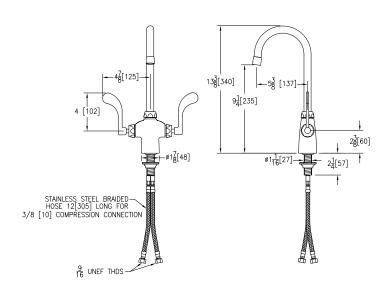

Rough-in/Overview dimensions

Compliance and Certification:

- Low-Lead Compliant
- **ADA Compliant**



XL LEAD FREE



ADA DESIGNED

Aerator Options:

	Flow rate GPM [LpM]	Vandal Resistant	Pressure Compressation	Outlet Type		
-2F	2.2[8.3]	✓	✓	Aerator		
-3F	0.5[1.9]	✓	✓	Spray		
-4F	2.2[8.3]	✓	✓	Laminar		
-7F	1.0[3.8]		✓	Spray		
-16F	1.0[3.8]	✓	✓	Spray		
-17F	1.5[5.7]	✓	✓	Aerator		
-18F	1.5[5.7]	✓	✓	Laminar		
-22F	1.0[3.8]	✓		Laminar		
-25F	1.0[3.8]	✓	✓	Spray		
-28F	1.0[3.8]	✓		Laminar		

Suffix Options:

-AR	Anti-Rotatioin Pins
-CST	Copper Supply Tubes
-FC	2.0 GPM [7.6L] Laminar Flow Control in
	Base of Spout
-G	1-1/4" [32mm] Grid Strainer Drain
-MY	Mixing Yoke Assembly Instead of Copper
	Supplies

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.



US 1.855.ONE.ZURN CANADA 1.905.405.8272 ZURN.COM